RBH®

Acmaxin®

配件系統
ACCESSORIES SYSTEM

角固虎鉗	ANGLE LOCK VISE
兩用分度盤	ROTARY TABLE
鎖刀座	TOOL HOLDER LOCKING DEVICE
臥式倒角機	CHAMFERING MACHINE
刀具架/車	TOOL STAND / TROLLEY
光電式尋邊器	TOUCH POINT SENSOR
高度設定器	DIAL GAUGE TOOL LENGTH SETTER
測試棒	TEST BAR
銑刀研磨機	END MILL GRINDER
刀具設定儀	TOOL PRESETTER
永磁盤	MAGNETIC CHUCK
磁力工作塊	MAGNETIC BLOCK UNIT
整流器	CHUCK CONTROLLER
開關式永久吊盤	PERMANENT MAGNETIC LIFYER

PROFESSIONAL NC ACCESSORIES SYSTEM

配件系統



MC PRESSURE - CONST ANT HYDRAULIC ANGLE LOCK VISE (BACK-TENSION)
MC 定壓式增壓角固虎鉗(後拉式)

特點:

- 角固式配合"半圓球體"下鎖之力，可防止工件上浮。
- 增壓式與機械式兩種使用方法。
- 虎鉗本台採用球狀石墨化鑄鐵FCD-60材質。
- 虎鉗滑動面均經硬化熱處理HRC45° ，堅固耐用確保精度。
- 虎鉗本體的高度與導正鍵槽皆做定寸管制，可以2、3、4台一起使用。
- 虎鉗有四種不同的夾持方式，供您選擇。




★虎鉗可側立使用
VISE CAN SIDE-LOCK TO WORK.

Feature:

- Down thrust with " semi-sphere " to prevent workpiece lift.
- Mechanical / Hydraulic. Two operate methods.
- Vise body is made of ductile iron FCD-60.
- Vise bed hardened to HRC45°and maintain accuracy for long.
- Vise bed height-size and the guide block side are all made with full control, can 2, 3, or 4 vises to perform a job at a time.
- Vise have 4 ways of clamping. For you to choice.


★每台虎鉗的高度與導正鍵槽皆做定寸管制。
The height and the guide block side of every vise are all made with full control.


L-尺寸公差限度0.02或少於
L- Dimension tolerance 0.02 or less.

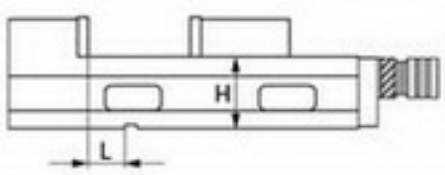



H-尺寸公差限度0.02或少於。
H- Dimension tolerance 0.02 or less.





1.


4.


2.


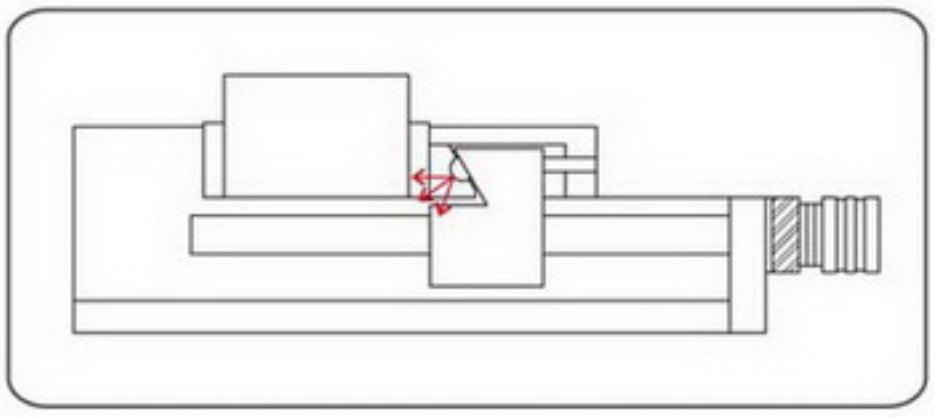
5.


3.


6.


No.	檢查項目 Inspection Item (100mm)	容許值 Allowance	
		JIN YEAR	JIS CLASS
1	鉗口面對本台底面導正鍵槽之平行度 Parallelism of guide block side of body bottom face and fixed jaw clamp face.	0.01	0.015
2	鉗口面對滑動面之垂直度 Squareness of fixed jaw clamp face and jaw slideway.	0.015	0.03
3	雙側面對滑動面之垂直度 Vise side-lock on bottom with the slide way in vertical.	0.02	0.02
4	本台滑動面對底面之平行度 Parallelism of body bottom face and jaw slideway.	0.01	0.015
5	工件夾緊後之上浮量 Top face lift of test block in clamping.	0.02	0.03
6	工件夾緊後之平行度 Parallelism of top face of clamped test block in clamping.	0.015	0.02

MC PRESSURE - CONST ANT HYDRAULIC ANGLE LOCK VISE (BACK-TENSION)
MC 定壓式增壓角固虎鉗(後拉式)





- 角固式配合"半圓球體"下鎖之力，可防止工件上浮。
- Down thrust with"semi-sphere" to prevent workpiece lift.





增壓式夾緊系統 Hydraulic System



機械式夾緊系統 Mechanical System

- 夾緊系統：增壓式與機械式兩種使用方法。
- Clamping System: Hydraulic / Mechanical Two operate methods.

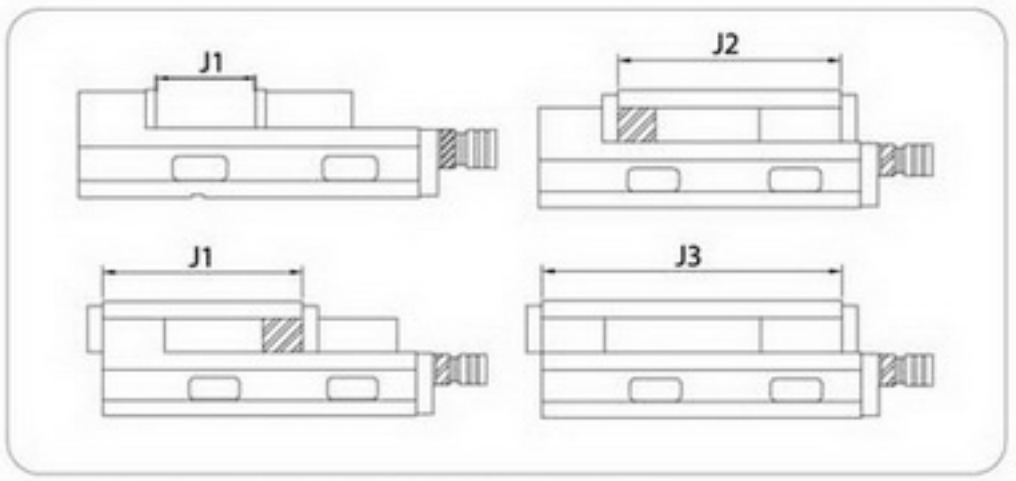

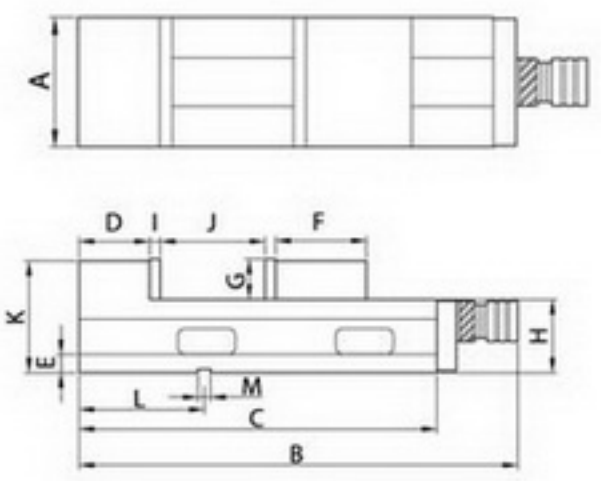



虎鉗有四種不同的夾持方式，供您選擇。
Vise have 4 ways of clamping. For you to choice.


Model No.	A	B	C	D	E	F	G	H	I	J	J1	J2	J3	K	L	M	N.W. (Kgs)	Clamping Force (Scale)
MHV-100	102	475	340	65	25	102	47	85	15	125	125-190	125-230	125-330	130	125	16	25	3000kgf
MHV-130	132	558	423	70	25	110	54	95	15	200	200-260	200-300	200-410	147	165	18	38	4400kgf
MHV-160	162	632	497	85	25	130	57	105	15	240	240-315	240-360	240-470	160	165	18	59	5000kgf
MHV-160A	162	692	557	85	25	130	57	105	15	300	300-375	300-420	300-530	160	165	18	65	5000kgf
MHV-200	202	710	570	90	25	139	62	110	18	280	280-360	280-409	280-530	170	190	18	80	7000kgf

- 標準附件：1. 把手一組。 2. 導正鍵2只/ 螺絲 x 2只(M6 x 12L)。 3. 虎鉗固定塊4只。 4. 螺絲16M x 75L x 4支。
  5. T型螺帽16M x 4只。 6. 華司16M x 4片
- 特殊附件：特殊虎口板(大開口用的虎口板)
- Standard Accessories：1. Handle x 1pc. 2. Guide Key x 2pcs / M6×12L x 2pcs. 3. Vise Locked Block x 4pcs.
  4. Screw 16M×75L x 4pcs. 5. T-Type Screw 16M x 4pcs. 6.Washer 16M x 4pcs.
- Optional Accessories： Special Application Jaw Plates.

MC 2. 3. 4 MULTIPLY HYDRAULIC ANGLE LOCK VISE
MC 並列式2. 3. 4台增壓角固虎鉗

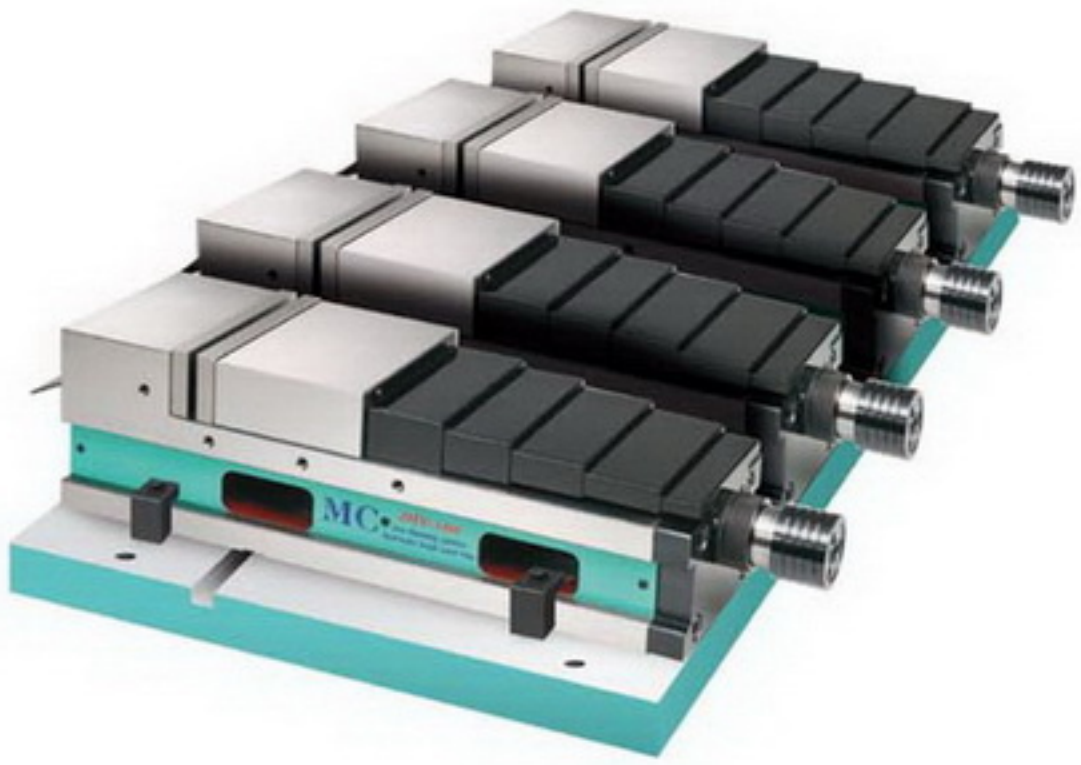


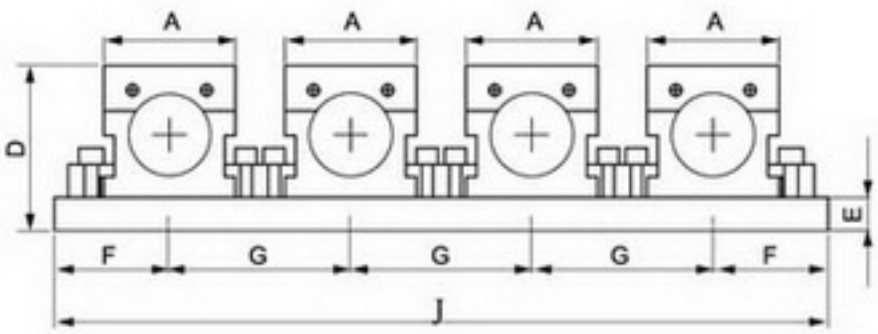


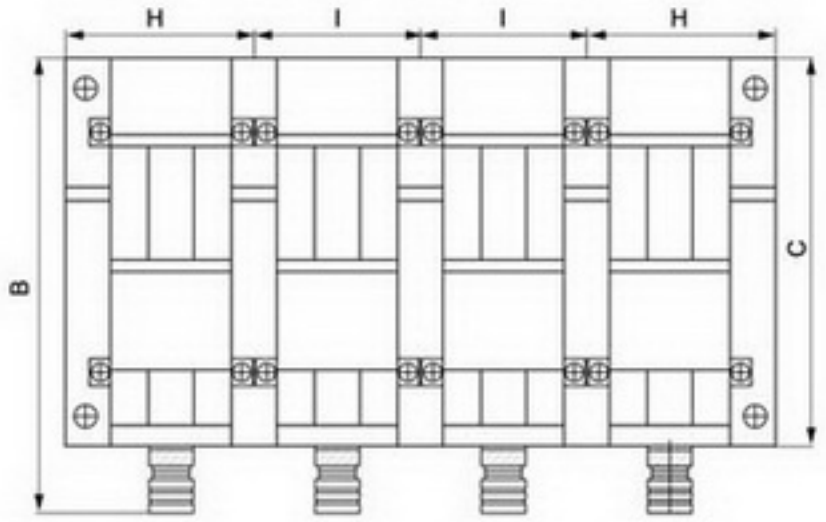

Model No.	A	B	C	D	E	F	G	H	I	J	N.W. (Kgs)
MHV-100-2S	102	475	358	163	30	105	300	180	150	510	94
MHV-100-3S	102	475	358	163	30	105	150	180	150	510	119
MHV-100-4S	102	475	358	163	30	105	150	180	150	660	156
MHV-130-2S	132	540	427	182	35	120	360	210	180	600	147
MHV-130-3S	132	540	427	182	35	120	180	210	180	600	185
MHV-130-4S	132	540	427	182	35	120	180	210	180	780	245
MHV-160-2S	162	629	513	200	40	140	440	250	220	720	236
MHV-160-3S	162	629	513	200	40	140	220	250	220	720	295
MHV-160-4S	162	629	513	200	40	140	220	250	220	940	390

MC 2. 4 VERTICAL HYDRAULIC ANGLE LOCK VISE
MC 直立式2. 4台增壓角固虎鉗

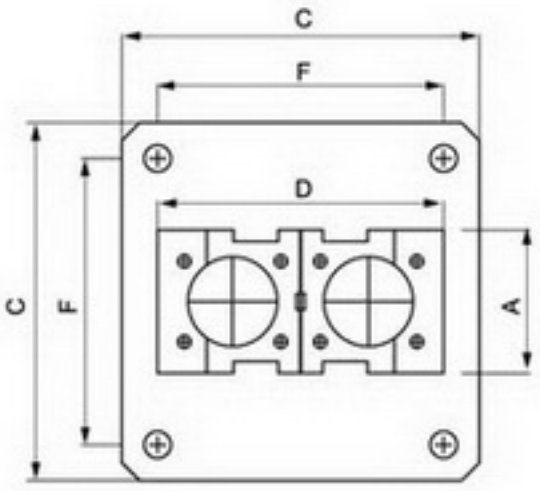


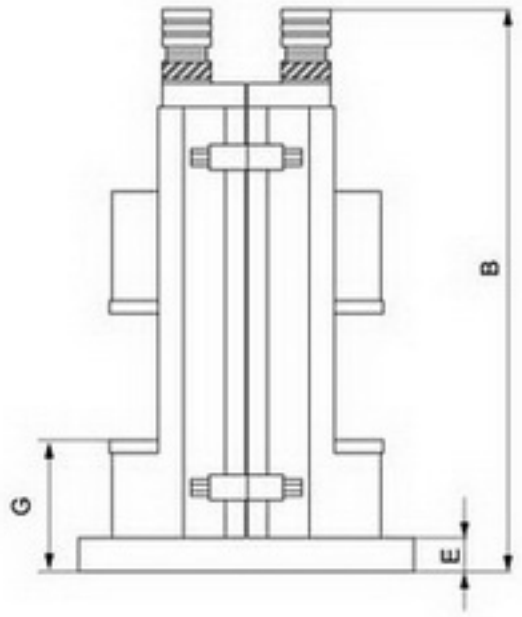




Model No.	A	B	C	D	E	F	G	N.W. (Kgs)
MHV-100-2V	102	515	300	266	40	200	134	79
MHV-100-4V	102	515	400	266	40	320	134	151
MHV-130-2V	132	580	300	294	40	200	152	105
MHV-130-4V	132	580	400	294	40	620	152	203
MHV-160-2V	162	669	400	320	40	320	156.5	169
MHV-160-4V	162	669	500	320	40	400	156.5	315
MHV-200-2V	202	750	400	340	40	320	169	211
MHV-200-4V	202	750	500	340	40	400	169	399

MC 4 VERTICAL On BLOCK HYDRAULIC ANGLE LOCK
MC 直立式4台增壓角固虎鉗附治具桶

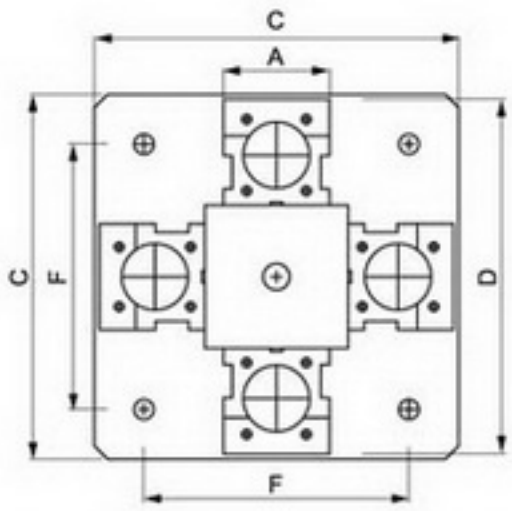

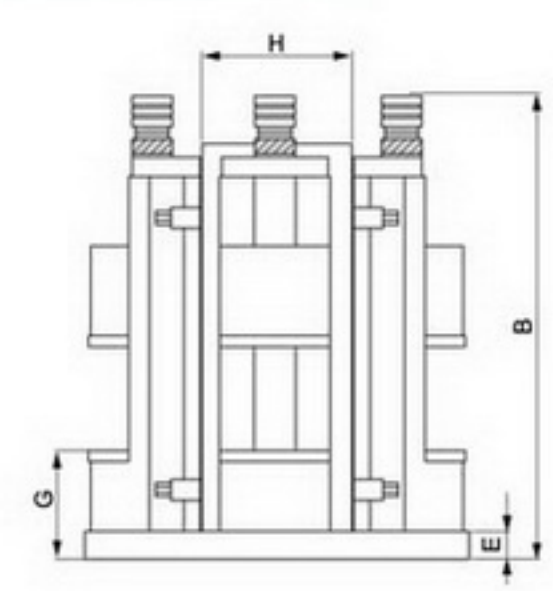

Model No.	A	B	C	D	E	F	G	H	N.W. (Kgs)
MHV-100-4VB	102	515	450	416	40	320	134	150	200
MHV-130-4VB	132	580	500	474	40	320	152	180	300
MHV-160-4VB	162	669	550	530	40	400	156.5	210	440
MHV-200-4VB	202	755	600	590	45	500	174	250	560

HYDRAULIC MACHINE VISE (BUILT-IN TYPE)
內藏式增壓虎鉗

特點:


- 適合立式綜合切削加工機，銑床使用。
- 虎鉗本台使用高延展性鑄鐵，防止變形。
- 本壓力系統只須小小施力，便可發揮強大的夾持力。
- 三個夾持範圍設計，可快速變換且操作簡便。

Feature:

- Most suitable for vertical machine center, milling machine.
- Vise body is made of high quality ductile cast iron resists bending.
- Pressure system for maximum clamping pressure with minimum force.
- 3 clamping ranges design:Quick to change and easy to operate.
- Vise pressure system with one year guarantee.




1.




3.




2.




4.



No.	檢查項目 Inspection Item (100mm)	容許值 Allowance	
		JIN YEAR	JIS CLASS
1	鉗口面對本台底面導正鍵槽之平行度 Parallelism of guide block side of body bottom face and fixed jaw clamp face.	0.01	0.015
2	鉗口面對滑動面之垂直度 Squareness of fixed jaw clamp face and jaw slideway.	0.02	0.03
3	兩邊鉗口之平行度 Both jaw plate parallelism. 0.015	0.015	0.02
4	本台滑動面對底面之平行度 Parallelism of body bottom face and jaw slideway..	0.01	0.015

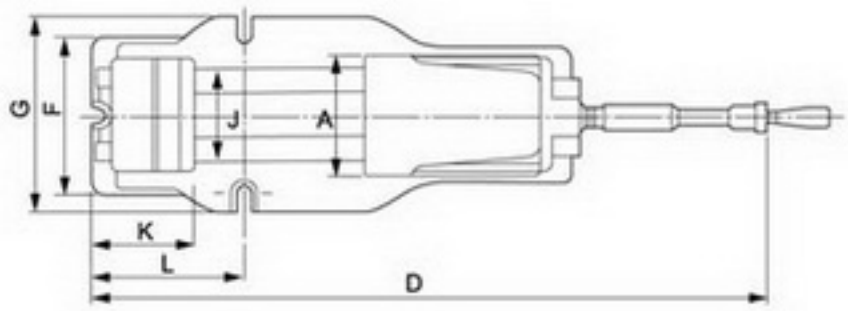

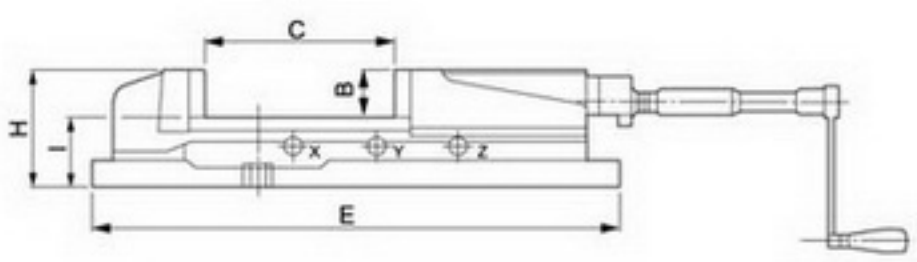

Model No.	A	B	C	D	E	F	G	H	I	J	K	L	Clamping range			Clamping Force (kgf)	Weight (Kgs)	
													X position	Y position	Z position		Table	Disk Rotary
HV-100	105	36	170	525	400	135	170	95	58	80	95	147	0-57	55-114	112-170	2500	21	7
HV-130	130	48	220	670	550	175	207	120	70.5	97	107	195	0-73	72-146	145-220	3000	38	8
HV-150	150	53	300	800	620	182	225	135	82.5	116	117	210	0-100	98-200	198-300	4500	53	11
HV-200	200	62	300	900	680	260	280	162	100	160	150	260	0-100	99-200	198-300	8000	95	13

TILTING HYDRAULIC VISE
傾斜式增壓虎鉗

特點:


- 本虎鉗不同於一般的銑床虎鉗，可依不同需求直接調整出加工角度，其垂直方向調整角度可從0至45度自由調整，刻劃的度數極為精確，可直接調整出加工角度。

Feature:


- The vise is different from general vise use for miller. It can be adjusted the angle for processing requirement, and its vertical angle can be adjusted freely 0-45.The graduation is very precise. You may read the processing angle clearly from the scale.




SWIVEL BASE 迴轉底盤

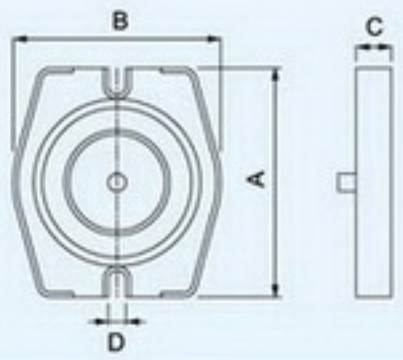


Model No.	A	B	C	D	G.W. (kgs)
HS-4	270	240	40.7	15	7
HS-5	292	267	44	17	8
HS-6	330	300	40.8	17	11
HS-8	380	345	42.2	19	13

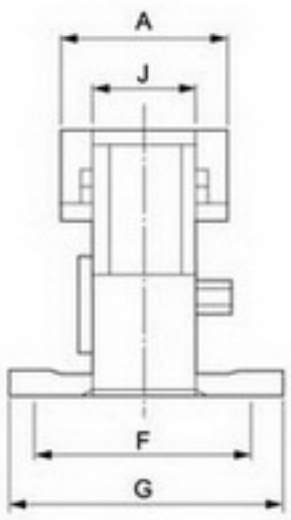

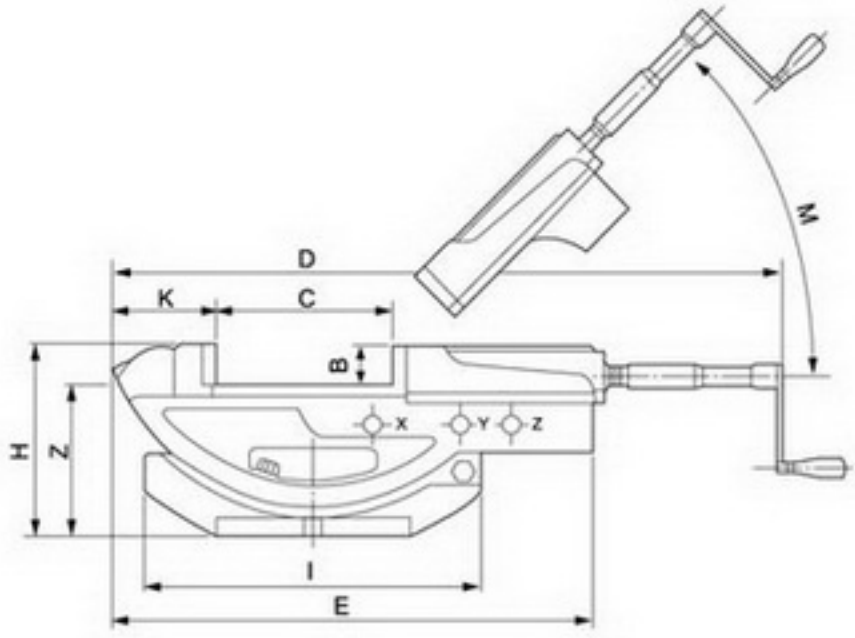

Model No.	A	B	C	D	E	F	G	H	I	J	K	M	Clamping Force (kgf)	Weight (kgs)	
														Body	Swivel Base
THV-100	105	36	0-170	547	404	106	165	191	340	80	92	0-45°	2500	26	7
THV-150	150	53	0-300	790	580	165	225	250	435	116	126	0-45°	4500	70	11

SIMPLE INDEXING SPACER
簡易型快速分度盤

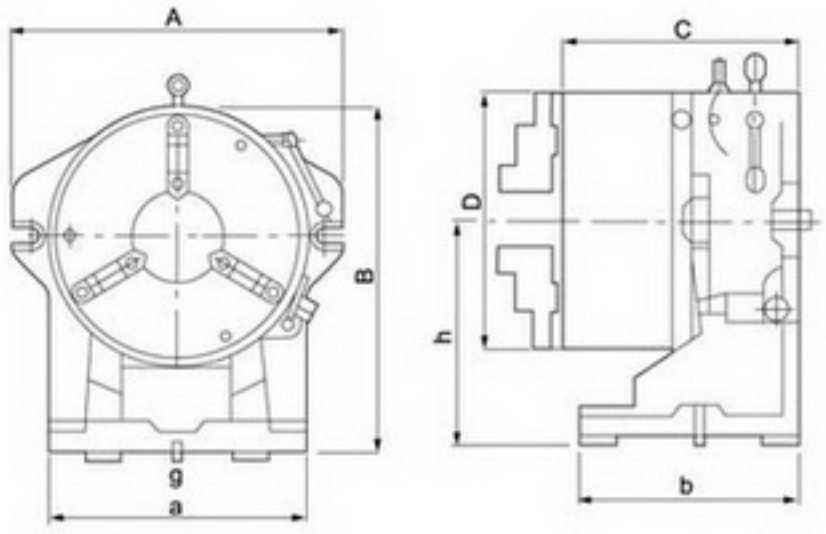

OPTIONAL ACCESSORY:
6" 3-Jaw Chuck for CC-6",
8" 3-Jaw Chuck for CC-8"




Model No.	Direct Dividing	A (mm)	B (mm)	C (mm)	D (mm)	a (mm)	b (mm)	h (mm)
CC-6	2, 3, 4, 6,8 ,12, 24	260	218	156	167	220	130	130
CC-8	2, 3, 4, 6,8 ,12, 24	318	318	177	210	228	140	150

Three Jaw	Width of Key(s) (g)	Outside Jaw	Inside Hole	Inside Hole of Ratary Tower	Weight (kgs)
4-42	16	10-156	44	36	32
4-62	16	10-180	63	63	70

SUPER INDEXING SPACER
強力型快速分度盤

OPTIONAL ACCESSORY:
6" 3-Jaw Chuck for CS-6",
8" 3-Jaw Chuck for CS-8"

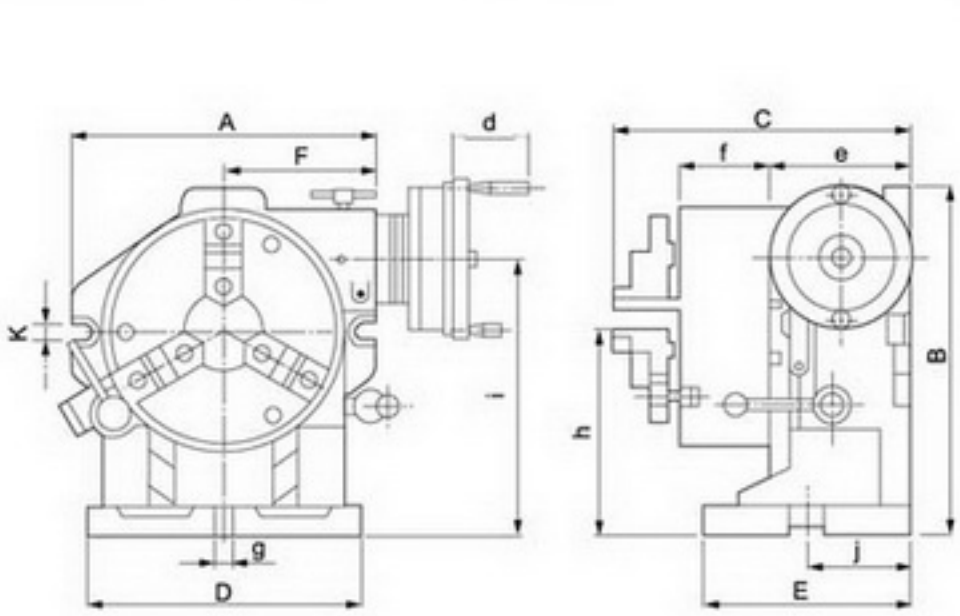




Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	k (mm)	Weight (kgs)
CS-6	250	235	221	220	150	117	82	112	66	16	130	186	80	18	35
CS-8	315	292	243	225	160	142	110	125	75	16	157	241	90	18	70

Model No.	Direct Dividing	Outside Dia. of disc	Inside Jaw	Outside Jaw	Dia. of Central Hole	Outside Dia.	Thickness
CS-6	2,3,4,6,8,12,24	167	4-42	10-156	44	203	50
CS-8	2,3,4,6,8,12,24	210	4-62	10-180	33	254	58

HORIZONTAL AND VERTICAL ROTARY TABLE
橫立兩用分度盤

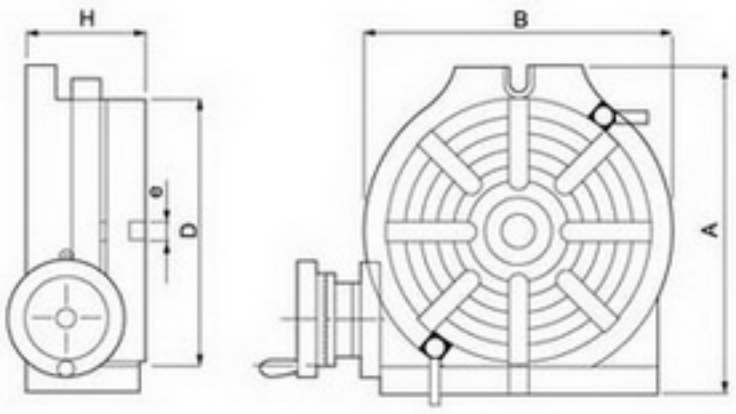



Model No.	Working Table		Base dimension		K-Slot (mm)	Center Taper	Worm Gearratio
	D(mm)	H(mm)	A(mm)	B(mm)			
CCHV-6"	150	80	200	160	18	MT-2	90 : 1
CCHV-8"	200	80	265	220	18	MT-3	90 : 1
CCHV-10"	250	110	325	280	18	MT-3	90 : 1
CCHV-12"	300	128	388	330	18	MT-4	90 : 1
CCHV-14"	350	130	450	380	18	MT-4	90 : 1
CCHV-16"	406	150	500	430	18	MT-5	90 : 1

BT TYPE TAPER WIPER BT型 擦拭棒

Feature

- 清潔棒的清潔片由小羊皮製成，可清理主軸內部，不傷主軸，防止靜電產生，延長主軸使用壽命。
- Cleaning shipd of taper wiper is made of lambskin. It can clean inside slides of spindles to prevention of static electricity and to extend spindles and tapers durable life.




Model No.	Taper	N.W. (kgs)	G.W. (kgs)	Shipment Size (cm)	Remarks
W-30	#30	0.06	0.08	41 x 26.5 x 18	30 支/箱 30pcs/CTN
W-40	#40	0.07	0.10	41 x 26.5 x 18	30 支/箱 30pcs/CTN
W-50	#50	0.16	0.2	41 x 26.5 x 18	10 支/箱 10pcs/CTN
W-30P	#30	0.06	0.08	41 x 26.5 x 18	30 支/箱 30pcs/CTN
W-40P	#40	0.07	0.10	41 x 26.5 x 18	30 支/箱 30pcs/CTN
W-50P	#50	0.16	0.2	41 x 26.5 x 18	10 支/箱 10pcs/CTN

HSK TYPE TAPER WIPER
HSK型 擦拭棒



Model No.	Taper	N.W. (kgs)	G.W. (kgs)	Shipment Size (cm)	Remarks
W-HSK40A	HSK40	0.08	0.1	41 x 29.5 x 20	10 支/箱 10pcs/CTN
W-HSK50H	HSK50 / HSK63F	0.08	0.12	41 x 29.5 x 20	10 支/箱 10pcs/CTN
W-HSK63H	HSK63	0.1	0.13	41 x 29.5 x 20	10 支/箱 10pcs/CTN
W-HSK100H	HSK100	0.5	0.7	41 x 29.5 x 20	1 支/箱 1pcs/CTN


TOOL HOLDER LOCKING DEVICE
鎖刀座

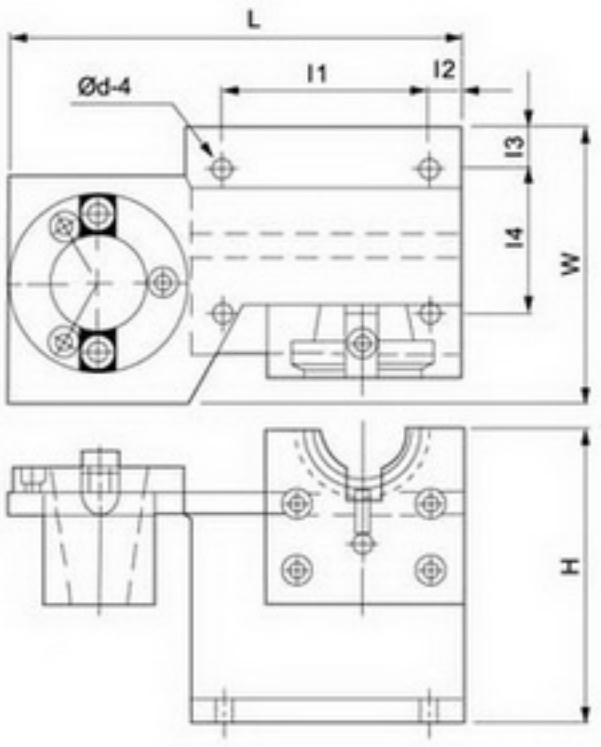



Model No.	Type	L (mm)	l1 (mm)	l2 (mm)	l3 (mm)	l4 (mm)	H (mm)	W (mm)	N.W. (kgs)	G.W. (kgs)	Shipment Size (cm)
LD-BT30A	BT30	210	95	10	15	67	130	100	3.6	3.7	22 x 11.5 x 14
LD-BT40A	BT40	210	95	10	15	67	130	100	3.7	3.9	22 x 11.5 x 14
LD-BT50A	BT50	275	113	20	24	105	200	150	11	11.4	29.5 x 17 x 21
LD-DIN40A	DIN40	210	95	10	15	67	130	100	3.6	3.8	22 x 11.5 x 14
LD-DIN50A	DIN50	275	113	20	24	105	200	150	10.8	11.2	29.5 x 17 x 21
LD-CAT40A	CAT40	210	95	10	15	67	130	100	3.6	3.8	22 x 11.5 x 14
LD-CAT50A	CAT50	272	113	20	24	105	200	150	10.8	11.2	29.5 x 17 x 21

TOOL HOLDER LOCKING DEVICE / HSK-I TYPE
鎖刀座/ HSK-I 型

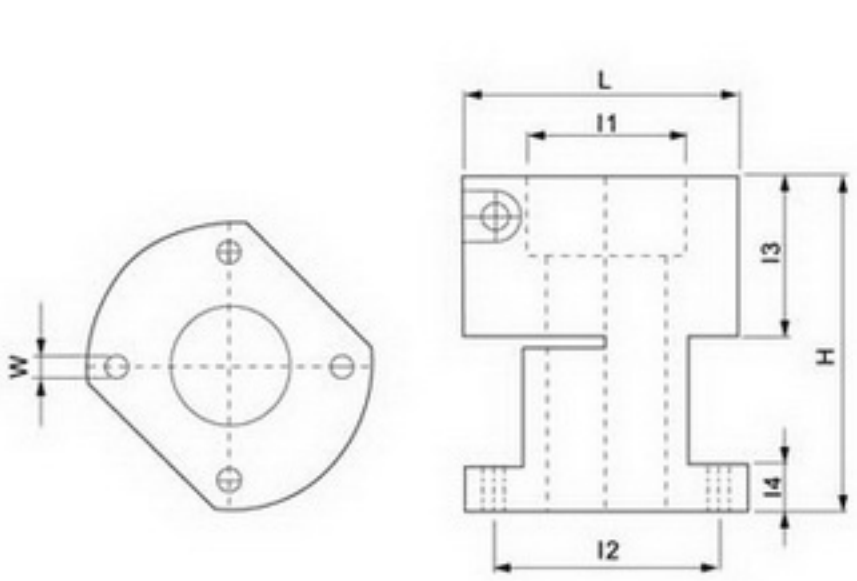



Model No.	Type	L (mm)	l1 (mm)	l2 (mm)	l3 (mm)	l4 (mm)	H (mm)	W (mm)	N.W. (kgs)	G.W. (kgs)	Shipment Size (cm)
LD-HSK32I	HSK32	72	32	57	36	15	91	7	0.7	0.8	13 x 10 x 16
LD-HSK40I	HSK40	80	40	65	39	15	94	7	0.9	1.04	13 x 10 x 16
LD-HSK50I	HSK50	90	50	71	50	15	105	7	1.2	1.3	13 x 10 x 16
LD-HSK63I	HSK63	103	63	82	56	15	121	7	1.4	1.6	22 x 11.5 x 14

52 PCS CLAMPING KITS
52 件萬能夾具

Contents

- 24 pcs. Stud each size x 4 pcs: 3", 4", 5", 6", 7", 8"
- 6 pcs Table slots (T-slot)
- 6 pcs Flanged nuts
- 4 pcs Coupling nuts
- 6 pcs Step clamps
- 6 pcs Step blocks
- 英制螺絲桿規格長度有：3", 4", 5", 6", 7", 8"各4支
- 6個T型螺帽
- 6個法蘭螺帽
- 4個接頭螺帽
- 6個齒型壓板
- 6個齒型墊板




Model No.	Stud Size	Weight (kgs)	Model No.	Stud Size	Weight (kgs)
CK-103	3/8 16W	8	CK-8M	M8-1.25P	6
CK-104B	1/2-12W	11.7	CK-10M	M10-1.5P	7.5
CK-105B	5/8-11W	14.5	CK-12M	M12-1.75P	10
CK-206	3/4-10W	25	CK-14M	M14-2.0P	11.5
			CK-16M	M16-2.0P	13.5
			CK-20M	M20-2.5P	25

TOOL STAND-TABLETOP
桌上型刀具架



Model No.	Shank Size (mm)	Tool Capacity
GA-1S1L-3	64W x 137D x 48H	BT/NT/CAT/NC30
GA-1S1L-4	74W x 137D x 63H	BT/NT/CAT/NC40
GA-1S1L-5	104W x 137D x 93H	BT/NT/CAT/NC50
GA-1S1L-6	104W x 137D x 93H	BT/NT/CAT/NC50

TOOL STAND
刀具架 - 單面&雙面

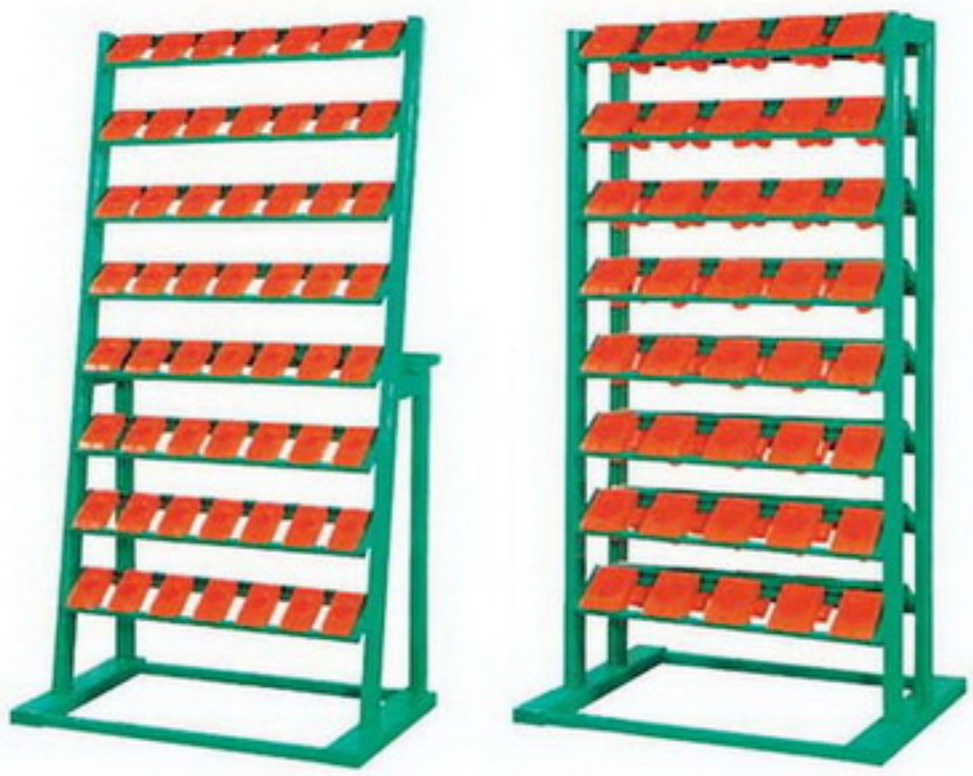


Model No.	Shank Size	Tool Capacity
GA-8S1L-3	ISO30	GR30 - 64PCS
GA-8S1L-4	ISO40	GR40 - 56 PCS
GA-8S1L-5	ISO50	GR50 - 40 PCS
GA-8S2L-3	ISO30	GR30 - 128 PCS
GA-8S2L-4	ISO40	GR30 - 112 PCS
GA-8S2L-5	ISO50	GR50 - 80 PCS

TOOL TROLLEY
刀具車



Model No.	Shank Size	Tool Capacity (刀具盒)	Drawer (附抽屜)
#30 TOOL TROLLEY (刀具車)-FIG.1	BT/NT/CAT/NC30	32PCS	x
#40 TOOL TROLLEY (刀具車)-FIG.1	BT/NT/CAT/NC40	28 PCS	x
#50 TOOL TROLLEY (刀具車)-FIG.1	BT/NT/CAT/NC50	20 PCS	x
#30 TOOL TROLLEY (刀具車)-FIG.2	BT/NT/CAT/NC30	32 PCS	2-SET
#40 TOOL TROLLEY (刀具車)-FIG.2	BT/NT/CAT/NC40	28 PCS	2-SET
#50 TOOL TROLLEY (刀具車)-FIG.2	BT/NT/CAT/NC50	20 PCS	2-SET

TOUCH POINT SENSOR
光電式尋邊器

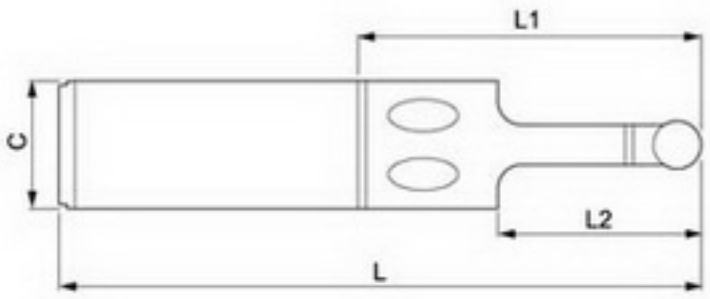



Model No.	C (mm)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	Weight (kgs)
TS20	20	10	160	85	50	0.5
TS32	32	10	160	85	50	1
TS-B20	20	10	160	85	50	0.5
TS-B32	32	10	160	85	50	1

TOUCH POINT SENSOR
偏心式尋邊器

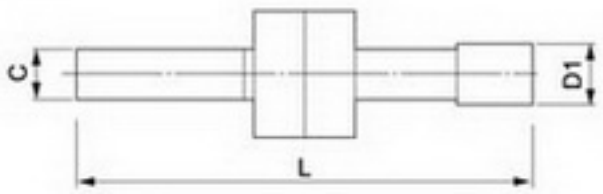


Fig.1

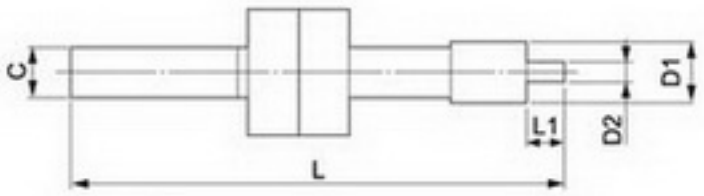


Fig.2



Model No.	C (mm)	D1 (mm)	D2 (mm)	L (mm)	L1 (mm)	Fig.
TS2-1020	10	10	-	82	-	1
TS2-0420	10	10	4	90	7.5	2
TS2-0610	10	10	6	65	11	-

CERAMIC EDGE FINDER
陶瓷尋邊器


- 主軸迴轉後尋邊器慢慢靠近加工物
- 側定面慢慢移動至中心後急速偏出點就是測定值。
- 移送測定端子(10mm)的一半(5mm)即主軸與加工面之端面是同一面。
- After spindle rotate, edge tool approach work piece slowly.
- After side set face moving slowly to center, rapidexcursion point is the measured data.
- Half of the transferred measured terminal is samewith the terminal of spindle.





CME-1020




CME-1010

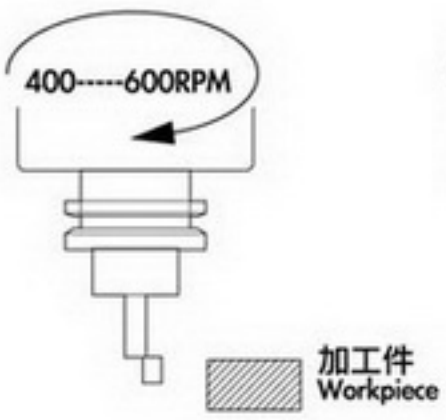

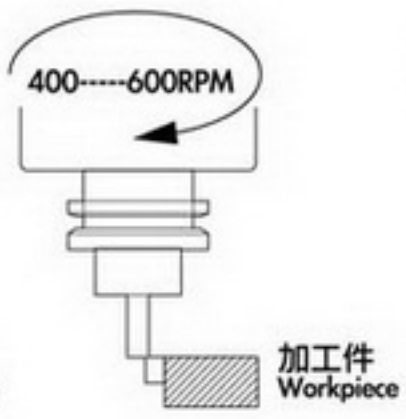

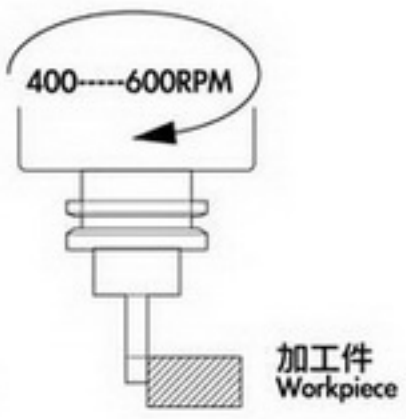

TEST BAR
測試棒

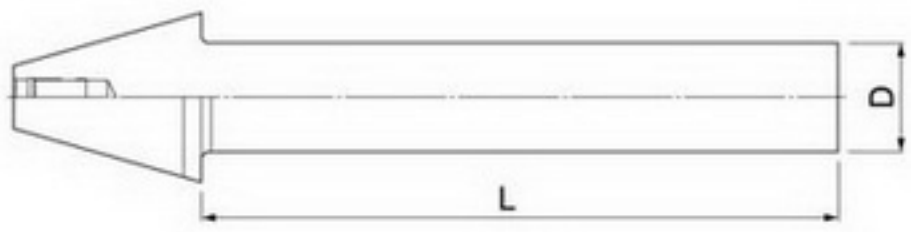



Model No.	ØD (mm)	L (mm)	Weight (kgs)
ISO30-30-200	30	200	1.16
ISO30-30250	30	250	1.56
ISO40-40-200	40	200	2.24
ISO40-40-250	40	250	2.53
ISO40-40-300	40	300	3.6
ISO40-40-350	40	350	-
ISO50-50-250	50	250	5.19
ISO50-50-300	50	300	5.55
ISO50-50-350	50	350	6.18
ISO50-50-400	50	400	7.7

DIAL GAUGE TOOL LENGTH SETTER
Z 軸高度設定器





Model No.		Weight (kgs)
LZ-50	50mm ±0.005	1.75

END MILL GRINDER
銑刀研磨機



銑刀研磨附件
END mill grinding attachment



鑽頭研磨附件
Twist drill grinding attachment



車刀研磨附件
Lathe tool grinding attachment



鑽石砂輪
Diamond grinding wheel



U2

規格表 Technical date	Model no : U2
最大夾持直徑 Max. collet capacity	Ø18mm
最大研磨直徑 Max. frinding dia.	Ø25mm
推拔角度 Taper angle	0° ~ 180°
離隙角 Relief angle	0° ~ 45°
負推拔角度 Negative angle	0° ~ 26°
主軸轉速 Grinding spindle	3600 r.p.m.
皿型砂輪直徑 Cup grinding wheel	100 x 50 x 20mm
馬達 Motor	1/3 HP 220V 50/60HZ
淨重 Net weight	45 Kgs
機械尺寸 Machine dimensions (LxW H)	45 x 40 x 35 cm
包裝材積 Packing dimensions (LxWxH)	55 x 45 x 47 cm

由於特殊之設計，萬能分度頭除有推拔角，離隙角之設置外，亦可提供360°, 180°之旋轉，研磨各種圓、半圓、正斜度、倒錐度、直角之單鋒刀具。此外分度頭亦可作每隔15°之設定，研磨各種方形、菱形、三角形之刀具沖子等。加上特殊配件並可研磨端銑刀之螺旋刃口，標準鉆頭及車刀等。

For grinding HSS and carbide engraving cutter as well as single lip or multiplelip cutters of various shapes such as radiused cutters or negative taper angle of cutters.

The universal index head is provided at 24 position so that any particular angle or shape can be obtained, free 360° or 180° rotation is allowed for grinding End Mills. Twist Drill, Lathe Tools, only replace the attachment to the index head without any complex setup.

標準附件 Standard Accessory	特別附件 Optional Accessory
1. 鑽石修刀 Wheel dresser with diamond 1pc	1. 鑽頭研磨附件 Twist drill grinding attachment
2. 砂輪法蘭 Wheel flange (mounted) 1 pc	2. 銑刀研磨附件 END mill grinding attachment
3. 砂輪 Grinding wheel 1 pc	3. 車刀研磨附件 Lathe tool grinding attachment
4. 筒夾 Collect Ø4 , 6 , 8 , 10 , 12 mm 5 pcs	4. 砂輪平衡架 Grinding wheel balancing stand
5. 校直器 Aligning finger (4 , 6 , 8 , 10 , 12mm) 1 pc	5. 筒夾 Collect (extra 1, 2, 2.5, 3, 5, 7, 9, 18, 20, 25mm and1/8", 3/16", 1/4", 5/16", 3/8", 1/2", 5/8")
6. 皮帶 Drive belt 1 pc	6. 鑽石砂輪 Diamond grinding wheel
7. 裝砂輪固定梢 Lock pin 1 pc	7. 刀具研磨附件 Ø20 , 25 Cutter
8. 固定砂輪工具 Tools 1 pc	8. 工具櫃 Tool cabinet

CONTACT TYPE TOOL PRESETTER - FIXED SPINDLE. SIMPLIFIED STRUCTURE
接觸式刀具設定儀 - 固定式主軸簡易型

標準配備
試棒:1隻 (D40, L200)
百分錶:2只
六角扳手:1組
防塵套:1件

選購配備
套筒:
ISO40#, 30#
HSK-63, 50, 40

Standard
Test Arbor:1 PC (D40, L200)
Dial Gauge: 2 PCS
Hex. Wrench: 1 SET
Dust Cover: 1 PC

Optional
Sleeve:
ISO40#, 30#
HSK-63, 50, 40



DH-3300



DH-4400

項目 Item	DH-3300 無快速位移 No fast traverse	DH-4400 快速位移 Fast traverse
規格 Specification	ISO-40# / ISO-50#	ISO-40# / ISO-50#
行程 Range of measurement	D: Ø300, L: 50~300	D: Ø400, L: 50~400
解析度 Resoltion	0.005	0.005
淨重/公斤 N.W./kgs	43	85
毛重/公斤 G.W./kgs	65	130
木箱尺寸/公分 CTN	73 x 46 x 86 cm	73 x 93 x 120 cm

CONTACT TYPE TOOL PRESETTER - ROTATING SPINDLE. PROFESSIONAL.
接觸式刀具設定儀 - 旋轉式主軸專業型

標準配備
1.試棒:1隻 (D40, L200)
2.百分錶:2只
3.六角扳手:1組
4.防塵套:1件

選購配備
1.套筒:
ISO40#, 30#
HSK-63, 50, 40
2.真空拉緊氣壓
3.RS232界面
4.連線軟體

Standard
1. Test Bar:1 PC (D40, L200)
2. Dial Gauge: 2 PCS
3. Hex. Wrench: 1 PC
4. Dust Cover: 1 PC

Optional
1.Sleeve:
Taper:
ISO40#, 30#
HSK-63, 50, 40
2.Tooling vacuum locking device.
3.RS232 Interface
4.Standard sofware



DH-4400E



DH6600E

項目 Item	DH-4400E 無快速位移 No fast traverse	DH-6600E 快速位移 Fast traverse
規格 Specification	ISO-50#	ISO-50#
行程 Range of measurement	D: Ø400, L: 50~400	D: Ø600, L: 50~600
解析度 Resoltion	0.005	0.005
淨重/公斤 N.W./kgs	100	150
毛重/公斤 G.W./kgs	150	215
木箱尺寸/公分 CTN	73 x 936 x 120 cm	90 x 105 x 140 cm

Memo

專業、精密、耐用