

简介 INTRODUCTION

Shenzhen Bwin Precision Tools Co., Ltd. was built in August 2007, has been doing OEM for peer enterprises, in the peer support and help of friends, after many years of hard work and struggle, has built a fairly professional, and rich practical experience, technical research and development and manufacturing team, excellent craft, delicate do manual work is broadly trained within the people's praise.

Our company constantly introduce suitable for mould, automobile, aviation, wind power, shipbuilding, manufacturing with superior cutting tools, according to the different needs of customers, the design scheme of complete sets of dao:

1, batch production fast drilling, SB broaching cutter, corn milling cutter, Angle cutter, T knife, aluminum knife plate, blade secondary use of obtuse Angle plate, earthquake tungsten steel cutter bar, big diameter cutter, conventional tool rod cutter disc inventory rich;

2, can be customized to drill and milling cutter chamfering an organic whole, boring cutter, large aperture rough boring cutter, nesting scraping knife, T stand with three sides blade, dovetail cutter knives, such as difficult;

3, special wholesale CNC blade, knife pad, carbide tungsten steel milling cutter, aluminum with a knife, lengthen the BT - FMB handle, lengthen the BT - ER the handle Extended strong milling cutter handle, lengthen extension rod, tube clip, screw, wrench tool accessories such as;

4, on a commission basis many well-known brand blade, head weight large Angle, coarse fine boring cutter series of cutting tools;

5, carbide cutter, drill bit, blades and so on need to old change new difference;

6, to undertake non-standard blades, non-standard alloy milling cutter, drill, profiled cutter machining and grinding;

7, undertake nc machine tool sales and the maintenance of transformation;


Company vigorously promote quality, enterprising infinite spirit of enterprise, to create a world-class tools suppliers as the goal, to do quality import and prices localization, the person who could afford, and everyone wants to use quality tools, make meager contribution to China's manufacturing industry.

我们用心打造一流品牌


WE CAREFULLY BUILD FIRST-CLASS BRAND


铣刀型号识别方法 Mill code Identify method


壳形铣刀盘 Face Mill

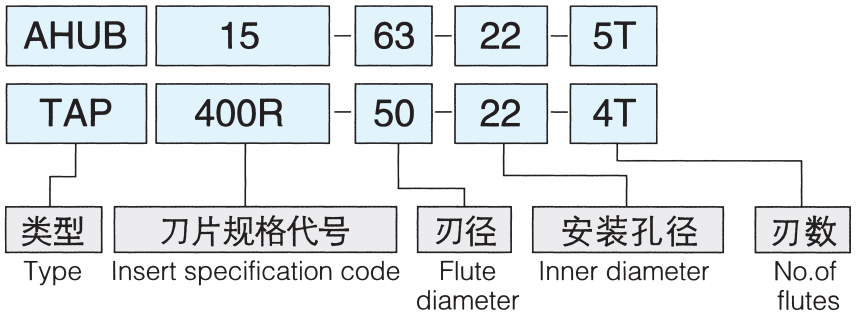


立铣刀杆 End Mill

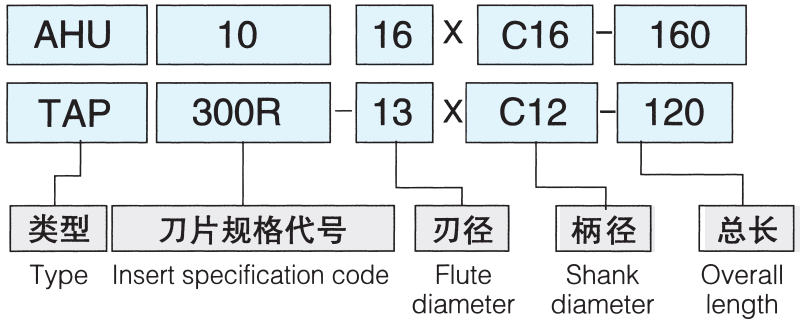

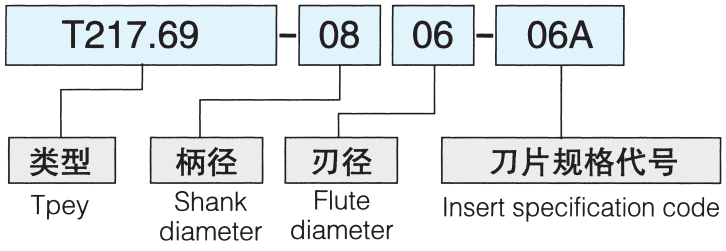

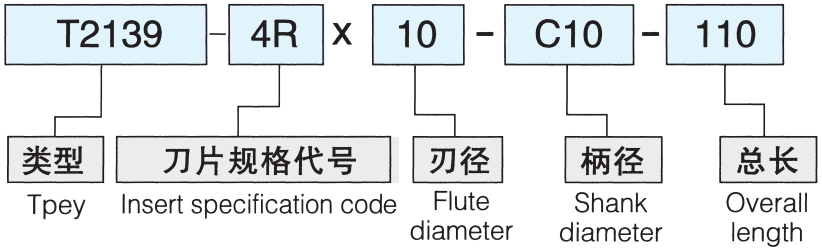

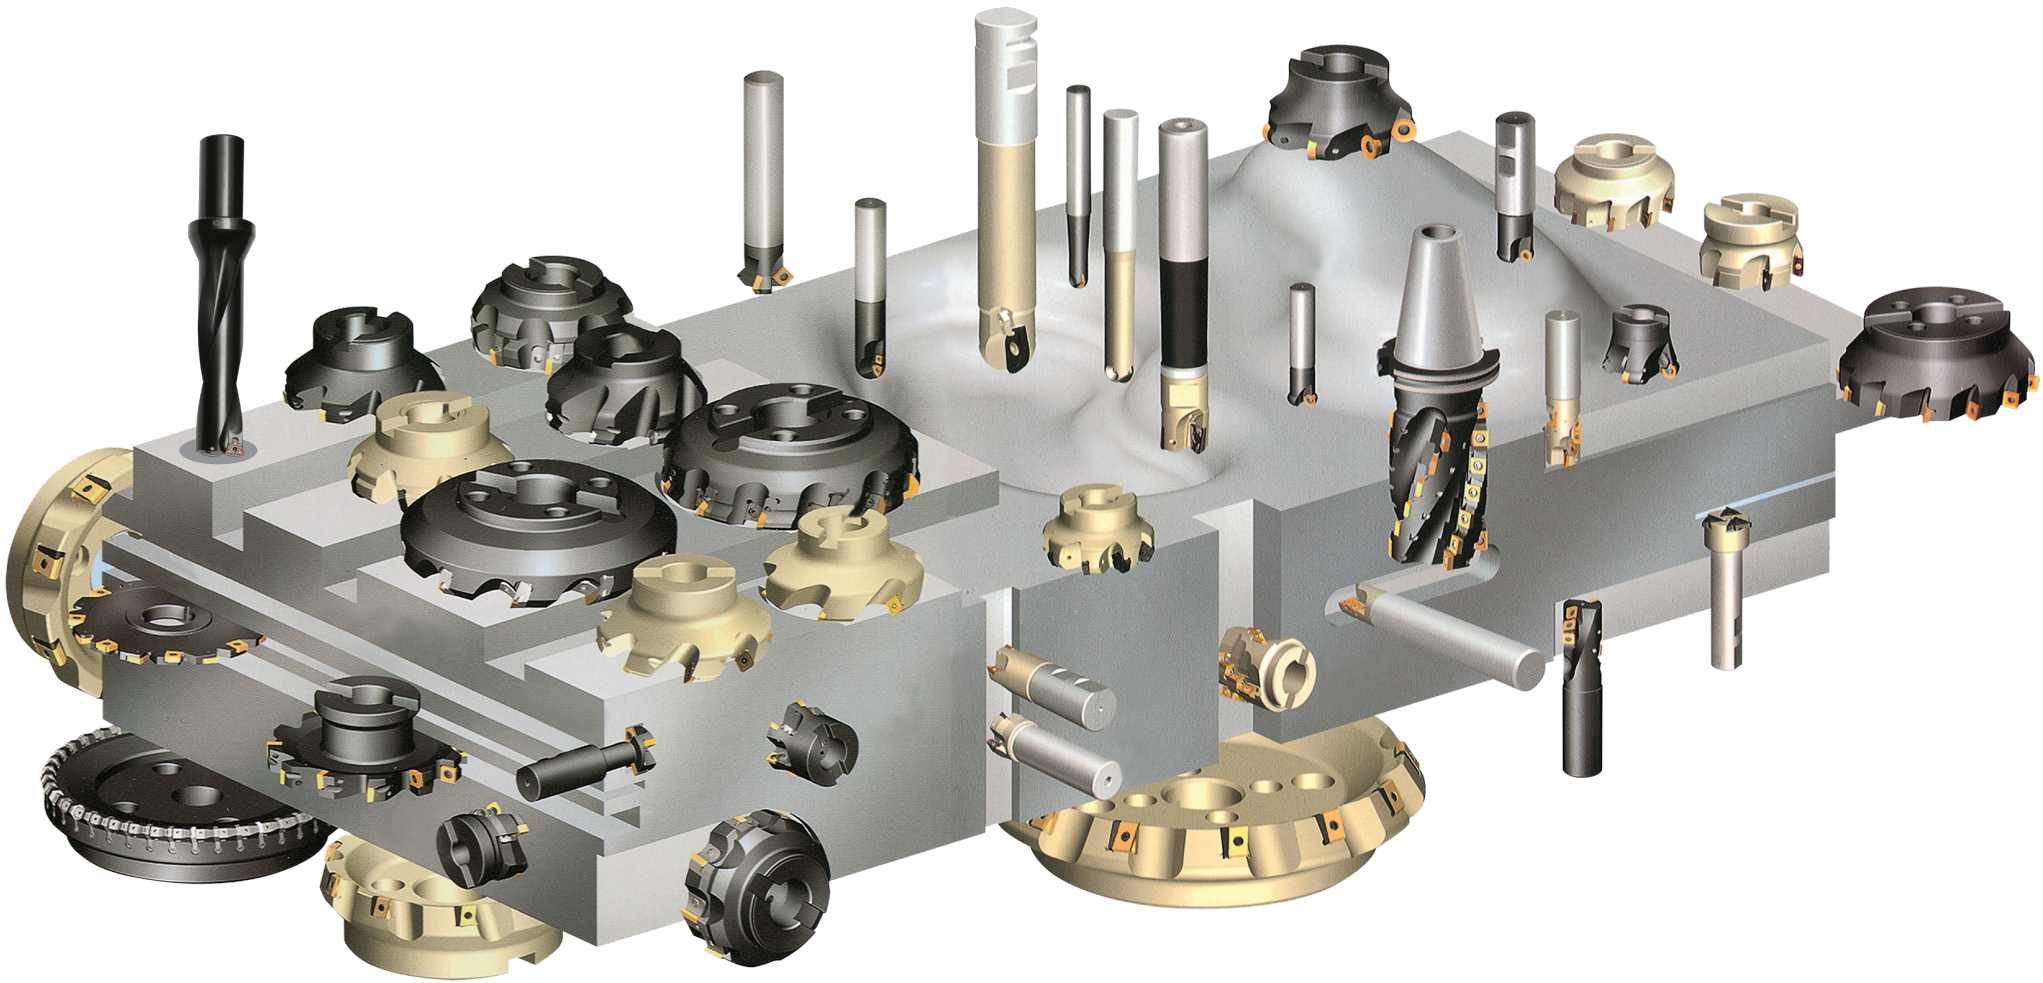


可转位铣削刀具功能示意图
Functional schematic diagram



刀杆系列，库存丰富，交货迅速。

Tool rod series, rich inventory, prompt delivery.

TAP 方肩铣刀TAP系列AP1135　TAP Series AP1135 Shoulder Milling Cutters

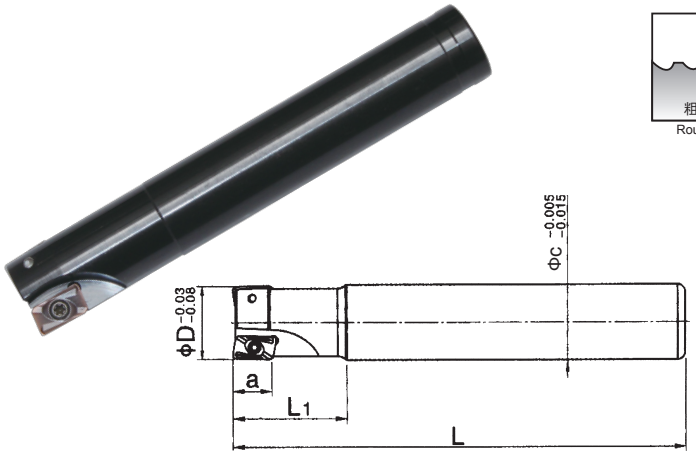



节能提示：
请保留您的报废刀片，RAP–75° 壳形铣刀，ASJ钻铣刀还能用，或联系本公司！
Energy saving tips:
Please keep your scrap blade, RAP – 75 ° shell cutter, ASJ drill milling cutter can also be used, or with your company!


★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
TAP 300R10-C10-100-1T	1	10	10	100	35	11	APMT 1135 PDER	M2.5×6	T8
TAP 300R10-C10-130-1T	1	10	10	130	35	11			
TAP 300R10-C10-150-1T	1	10	10	150	35	11			
TAP 300R12-C12-100-1T	1	12	12	100	35	11			
TAP 300R12-C12-130-1T	1	12	12	130	35	11			
TAP 300R12-C12-150-1T	1	12	12	150	35	11			
TAP 300R12-C12-200-1T	1	12	12	200	35	11			
TAP 300R13-C12-100-1T	1	13	12	100	35	11			
TAP 300R13-C12-130-1T	1	13	12	130	35	11			
TAP 300R13-C12-150-1T	1	13	12	150	35	11			
TAP 300R16-C15-150-2T	2	16	15	150	45	11	APMT 1135 PDER	M2.5×6	
TAP 300R16-C15-200-2T	2	16	15	200	45	11			
TAP 300R16-C15-250-2T	2	16	15	250	45	11			
TAP 300R16-C15.6-150-2T	2	16	15.6	150	45	11			
TAP 300R16-C15.6-200-2T	2	16	15.6	200	45	11			
TAP 300R16-C15.6-250-2T	2	16	15.6	250	45	11			
TAP 300R16-C16-120-2T	2	16	16	120	45	11			
TAP 300R16-C16-150-2T	2	16	16	150	45	11			
TAP 300R16-C16-200-2T	2	16	16	200	45	11			
TAP 300R16-C16-250-2T	2	16	16	250	45	11			
TAP 300R16-C16-300-2T	2	16	16	300	45	11			
TAP 300R17-C16-150-2T	2	17	16	150	45	11			
TAP 300R17-C16-200-2T	2	17	16	200	45	11			
TAP 300R20-C20-150-2T	2	20	20	150	45	11			
TAP 300R20-C20-200-2T	2	20	20	200	45	11			
TAP 300R20-C20-250-2T	2	20	20	250	45	11			
TAP 300R20-C20-300-2T	2	20	20	300	45	11			
TAP 300R21-C20-150-2T	2	21	20	150	45	11			
TAP 300R21-C20-200-2T	2	21	20	200	45	11			
TAP 300R21-C20-250-2T	2	21	20	250	45	11			
TAP 300R21-C20-300-2T	2	21	20	300	45	11			
TAP 300R25-C24-150-3T	3	25	24	150	45	11	APMT 1135 PDER	M2.5×6	
TAP 300R25-C24-200-3T	3	25	24	200	45	11			
TAP 300R25-C24-250-3T	3	25	24	250	45	11			
TAP 300R25-C24-300-3T	3	25	24	300	45	11			
TAP 300R25-C25-150-3T	3	25	25	150	45	11			
TAP 300R25-C25-200-3T	3	25	25	200	45	11			
TAP 300R25-C25-250-3T	3	25	25	250	45	11			
TAP 300R25-C25-300-3T	3	25	25	300	45	11			

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm) D	c	L	L1	a	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
TAP 300R11-C10-100-1T	1	11	10	100	35	11	APMT 1135 PDER	M2.5×6	T8
TAP 300R11-C10-130-1T	1	11	10	130	35	11			
TAP 300R11-C10-150-1T	1	11	10	150	35	11			
TAP 300R14-C14-150-1T	1	14	14	150	35	11			
TAP 300R14-C14-200-1T	1	14	14	200	35	11			
TAP 300R15-C15-150-2T	2	15	15	150	35	11			
TAP 300R15-C15-200-2T	2	15	15	200	35	11			
TAP 300R18-C16-150-2T	2	18	16	150	35	11			
TAP 300R18-C16-200-2T	2	18	16	200	35	11			
TAP 300R18-C16-250-2T	2	18	16	250	35	11			
TAP 300R19-C19-150-2T	2	19	19	150	45	11	APMT 1135 PDER	M2.5×6	
TAP 300R19-C19-200-2T	2	19	19	200	45	11			
TAP 300R19-C19-250-2T	2	19	19	250	45	11			
TAP 300R22-C20-150-2T	2	22	20	150	45	11			
TAP 300R22-C20-200-2T	2	22	20	200	45	11			
TAP 300R22-C20-250-2T	2	22	20	250	45	11			
TAP 300R26-C25-150-3T	3	269	25	150	45	11			
TAP 300R26-C25-200-3T	3	26	25	200	45	11			
TAP 300R26-C25-250-3T	3	26	25	250	45	11			
TAP 300R26-C25-300-3T	3	26	25	300	45	11			
TAP 300R27-C25-150-3T	3	27	25	150	45	11			
TAP 300R27-C25-200-3T	3	27	25	200	45	11			
TAP 300R27-C25-250-3T	3	27	25	250	45	11			
TAP 300R28-C25-150-3T	3	28	25	150	45	11			
TAP 300R28-C25-200-3T	3	28	25	200	45	11			
TAP 300R28-C25-250-3T	3	28	25	250	45	11			
TAP 300R29-C25-150-3T	3	29	25	150	45	11			
TAP 300R29-C25-200-3T	3	29	25	200	45	11			
TAP 300R29-C25-250-3T	3	29	25	250	45	11			
TAP 300R30-C25-150-3T	3	30	25	150	45	11			
TAP 300R30-C25-200-3T	3	30	25	200	45	11			
TAP 300R30-C25-250-3T	3	30	25	250	45	11			
TAP 300R32-C32-150-4T	4	32	32	150	45	11	APMT 1135 PDER	M2.5×6	
TAP 300R32-C32-200-4T	4	32	32	200	45	11			
TAP 300R32-C32-250-4T	4	32	32	250	45	11			
TAP 300R40-C32-150-4T	4	40	32	150	45	11			
TAP 300R40-C32-200-4T	4	40	32	200	45	11			
TAP 300R50-C32-150-5T	5	50	32	150	45	11			
TAP 300R50-C32-200-5T	5	50	32	200	45	11			
3#莫氏 TAP 300R20-2T	2	20			45	11			


型 号 Cat.No	BT015	BT065		BM035			BN01													刀片形状 Insert sharp	尺寸 Size(mm) L1	L2	S1	F1	Re	
APMT1135PDER-XM	●	●																			11	6.35	3.5	1.5	0.4	BWIN
APMT1135PDER-H2				●																	11	6.35	3.5	1.2	0.8	
																					11	6.35	3.5	0.8	1.2	
																					11	6.35	3.5	0.4	1.6	
																					11	6.35	3.5	0.4	2.4	
APMT1135PDER-M2				●																	11	6.35	3.5	1.8	0.2	
																					11	6.35	3.5	1.5	0.4	
																					11	6.35	3.5	1.2	0.8	
APGT1135PDER-G2							●														11	6.35	3.5	1.2	0.8	



注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TAP 方肩铣刀TAP系列AP1604　TAP Series AP1604 Shoulder Milling Cutters



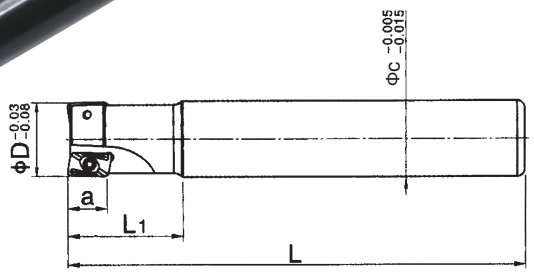




节能提示：
请保留您的报废刀片，RAP–75° 壳形铣刀，ASJ钻铣刀还能用，或联系本公司！
Energy saving tips:
Please keep your scrap blade, RAP – 75 ° shell cutter, ASJ drill milling cutter can also be used, or with your company!

★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.


型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
TAP 400R25-C20-150-2T	2	25	20	150	45	16	APMT 1604 PDER	M4×10	T15
TAP 400R25-C20-200-2T	2	25	20	200	45	16			
TAP 400R25-C24-150-2T	2	25	24	150	45	16			
TAP 400R25-C24-200-2T	2	25	24	200	45	16			
TAP 400R25-C24-250-2T	2	25	24	250	45	16			
TAP 400R25-C24-300-2T	2	25	24	300	45	16			
TAP 400R25-C25-150-2T	2	25	25	150	45	16			
TAP 400R25-C25-200-2T	2	25	25	200	45	16			
TAP 400R25-C25-250-2T	2	25	25	250	45	16			
TAP 400R25-C25-300-2T	2	25	25	300	45	16			
TAP 400R26-C25-150-2T	2	26	25	150	45	16			
TAP 400R26-C25-200-2T	2	26	25	200	45	16			
TAP 400R26-C25-250-2T	2	26	25	250	45	16			
TAP 400R30-C25-150-2T	2	30	25	150	45	16			
TAP 400R30-C25-200-2T	2	30	25	200	45	16			
TAP 400R30-C25-250-2T	2	30	25	250	45	16			
TAP 400R30-C25-300-2T	2	30	25	300	45	16			
TAP 400R32-C25-150-2T	2	32	25	150	45	16			
TAP 400R32-C25-200-2T	2	32	25	200	45	16			
TAP 400R32-C25-250-2T	2	32	25	250	45	16			
TAP 400R32-C25-300-2T	2	32	25	300	45	16			
TAP 400R32-C32-150-2T	2	32	32	150	45	16			
TAP 400R32-C32-200-2T	2	32	32	200	45	16			
TAP 400R32-C32-250-3T	3	32	32	250	45	16	APMT 1604 PDER	M4×10	
TAP 400R32-C32-300-3T	3	32	32	300	45	16			
TAP 400R35-C32-150-3T	3	35	32	150	45	16			
TAP 400R35-C32-200-3T	3	35	32	200	45	16			
TAP 400R35-C32-250-3T	3	35	32	250	45	16			
TAP 400R35-C32-300-3T	3	35	32	300	45	16			
TAP 400R35-C32-350-3T	3	35	32	350	45	16			
TAP 400R35-C32-400-3T	3	35	32	400	45	16			
TAP 400R35-C32-450-3T	3	35	32	450	45	16			
TAP 400R35-C32-500-3T	3	35	32	500	45	16			
TAP 400R35-C32-550-3T	3	35	32	550	45	16			
TAP 400R40-C32-150-3T	3	40	32	150	45	16			
TAP 400R40-C32-200-3T	3	40	32	200	45	16			
TAP 400R40-C32-250-3T	3	40	32	250	45	16			
TAP 400R40-C32-300-3T	3	40	32	300	45	16			
TAP 400R40-C32-350-3T	3	40	32	350	45	16			
TAP 400R40-C32-400-3T	3	40	32	400	45	16			
TAP 400R40-C32-450-3T	3	40	32	450	45	16			

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm) D	c	L	L1	a	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
TAP 400R22-C20-150-2T	2	22	20	150	45	16	APMT 1604 PDER	M4×10	T15
TAP 400R22-C20-200-2T	2	22	20	200	45	16			
TAP 400R22-C20-250-2T	2	22	20	150	45	16			
TAP 400R23-C20-150-2T	2	23	20	200	45	16			
TAP 400R23-C20-200-2T	2	23	20	250	45	16			
TAP 400R23-C20-250-2T	2	23	20	300	45	16			
TAP 400R24-C24-150-2T	2	24	24	150	45	16			
TAP 400R24-C24-200-2T	2	24	24	200	45	16			
TAP 400R24-C24-250-2T	2	24	24	250	45	16			
TAP 400R27-C25-150-2T	2	27	25	150	45	16			
TAP 400R27-C25-200-2T	2	27	25	200	45	16			
TAP 400R27-C25-250-2T	2	27	25	250	45	16			
TAP 400R28-C25-150-2T	2	28	25	150	45	16			
TAP 400R28-C25-200-2T	2	28	25	200	45	16			
TAP 400R28-C25-250-2T	2	28	25	250	45	16			
TAP 400R33-C32-150-3T	3	33	32	150	45	16			
TAP 400R33-C32-200-3T	3	33	32	200	45	16			
TAP 400R33-C32-250-3T	3	33	32	250	45	16			
TAP 400R33-C32-300-3T	3	33	32	300	45	16			
TAP 400R34-C32-150-3T	3	34	32	150	45	16			
TAP 400R34-C32-200-3T	3	34	32	200	45	16			
TAP 400R34-C32-250-3T	3	34	32	250	45	16			
TAP 400R34-C32-300-3T	3	34	32	300	45	16			
TAP 400R50-C32-150-4T	4	50	32	150	45	16	APMT 1604 PDER	M4×10	
TAP 400R50-C32-200-4T	4	50	32	200	45	16			
TAP 400R63-C32-150-4T	4	63	32	150	45	16			
TAP 400R63-C32-200-4T	4	63	32	200	45	16			
3#莫氏 TAP 400R25-2T	2	25			45	16			
3#莫氏 TAP 400R28-2T	2	28			45	16			
4#莫氏 TAP 300R20-2T	2	20			45	16			
4#莫氏 TAP 400R25-2T	2	25			45	16			
4#莫氏 TAP 400R28-2T	2	28			45	16			
4#莫氏 TAP 400R30-3T	3	30			45	16			
4#莫氏 TAP 400R32-3T	3	32			45	16			
4#莫氏 TAP 400R36-3T	3	36			45	16			
4#莫氏 TAP 400R40-3T	3	40			45	16			
4#莫氏 TAP 400R45-4T	4	45			45	16			
4#莫氏 TAP 400R50-4T	4	50			45	16			
4#莫氏 TAP 400R63-4T	4	63			45	16			
4#莫氏 TAP 400R80-5T	5	80			45	16			

型 号 Cat.No	BT015		BM035			BT065		BN01												刀片形状 Insert sharp	尺寸 Size(mm) L1	L2	S1	F1	Re	
APMT1604PDER-H2	●		●			●															16.5	9.525	4.76	1.7	0.4	BWIN
																					16.5	9.525	4.76	1.7	0.8	
																					16.5	9.525	4.76	1.7	1.6	
																					16.5	9.525	4.76	1.7	2.4	
																					16.5	9.525	4.76	1.7	3.2	
APMT1604PDER-M2	●		●★			●															16.5	9.525	4.76	1.7	0.8	
APMT1604PDER-G2								●													16.5	9.525	4.76	1.7	0.8	
APMT1604PDSR									●	●	●	●	●								16.4	9.525	4.76	-	0.8	
APMT1604PDERMA2														●	●						16.4	9.525	4.76	-	0.8	

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

UEX 直角台肩精铣刀　　UEX 90° Angle Shoulder Milling Cutter

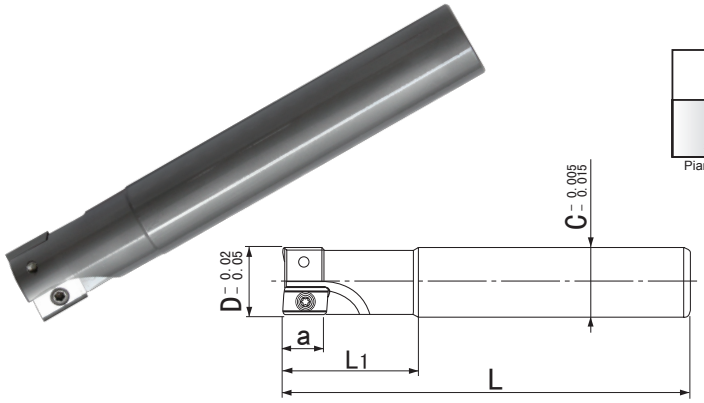




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
UEX16-C16-120-2T	2	16	16	120	45	12.7	APET120204	M2.5*6	T8
UEX17-C16-120-2T	2	17	16	120	45	12.7			
UEX16-C16-150-2T	2	16	16	150	45	12.7			
UEX16-C16-200-2T	2	16	16	200	45	12.7			
UEX17-C20-150-2T	2	17	20	150	45	12.7			
UEX17-C20-200-2T	2	17	20	200	45	12.7			
UEX20-C20-120-2T	2	20	20	120	45	12.7			
UEX20-C20-150-2T	2	20	20	150	45	12.7			
UEX20-C20-200-2T	2	20	20	200	45	12.7			
UEX21-C20-150-2T	2	21	20	150	45	16	ADET16030□□R ADEW160308SR ADNT160308□R	M4*9	T15
UEX21-C20-200-2T	2	21	20	200	45	16			
UEX25-C25-150-3T	3	25	25	150	45	16			
UEX25-C25-200-3T	3	25	25	200	45	16			
UEX26-C25-150-3T	3	26	25	150	45	16			
UEX26-C25-200-3T	3	26	25	200	45	16			
UEX32-C32-150-3T	3	32	32	150	45	16			
UEX32-C32-200-3T	3	32	32	200	45	16			
UEX33-C32-150-3T	3	33	32	150	45	16			
UEX33-C32-200-3T	3	33	32	200	45	16			
UEX35-C32-150-3T	3	35	32	150	45	16			
UEX35-C32-200-3T	3	35	32	200	45	16			
UEX40-C32-150-3T	3	40	32	150	45	16			
UEX40-C32-200-3T	3	40	32	200	45	16			


可配用刀片 Inserts

型 号 Cat.No						刀片形状 Insert sharp	尺寸 Size(mm)					
							L1	L2	S1	θ	R	
APET120202SR		●	●				12.7	7.938	2.5	11	0.2	BWIN
APET120202ER							12.7	7.938	2.5	11	0.2	
APET120202FR					●		12.7	7.938	2.5	11	0.2	
APET120204SR		●	●	●			12.7	7.938	2.5	11	0.4	
APET120204ER					●		12.7	7.938	2.5	11	0.4	
APET120208SR		●	●	●			12.7	7.938	2.5	11	0.8	
APET120208ER					●		12.7	7.938	2.5	11	0.8	
APEW120204SR							12.7	7.938	2.5	11	0.4	
ADET160302SR		●		●			15.875	9.525	3.18	15	0.2	
ADET160302ER							15.875	9.525	3.18	15	0.2	
ADET160302FR					●		15.875	9.525	3.18	15	0.2	
ADET160304SR		●		●			15.875	9.525	3.18	15	0.4	
ADET160304ER					●		15.875	9.525	3.18	15	0.4	
ADEW160308SR							15.875	9.525	3.18	15	0.8	
ADNT160308SR		●	●	●			15.875	9.525	3.18	15	0.8	
ADNT160308ER	●				●		15.875	9.525	3.18	15	0.8	

AHU 直角台肩精铣刀　AHU 90° Angle Shoulder Milling Cutter






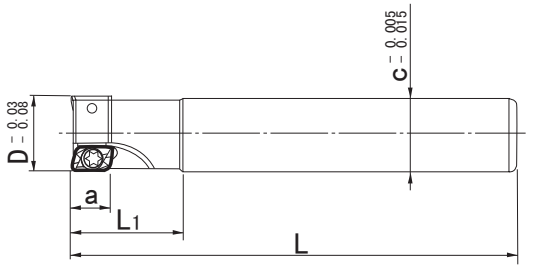

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
AHU16-C16-120-2T	2	16	16	120	45	11	JDMT 1003	M2.5*6	T8
AHU17-C16-120-2T	2	17	16	120	45	11			
AHU16-C16-150-2T	2	16	16	150	45	11			
AHU16-C16-200-2T	2	16	16	200	45	11			
AHU17-C20-150-2T	2	17	20	150	45	11			
AHU17-C20-200-2T	2	17	20	200	45	11			
AHU20-C20-120-2T	2	20	20	120	45	11			
AHU20-C20-150-2T	2	20	20	150	45	11			
AHU20-C20-200-2T	2	20	20	200	45	11			
AHU21-C20-150-2T	2	21	20	150	45	11			
AHU21-C20-200-2T	2	21	20	200	45	11			
AHU25-C25-150-2T	2	25	25	150	45	16	JDMT 1505	M4×9	T15
AHU25-C25-200-2T	2	25	25	200	45	16			
AHU26-C25-150-2T	2	26	25	150	45	16			
AHU26-C25-200-2T	2	26	25	200	45	16			
AHU32-C32-150-3T	3	32	32	150	45	16			
AHU32-C32-200-3T	3	32	32	200	45	16			
AHU33-C32-150-3T	3	33	32	150	45	16			
AHU33-C32-200-3T	3	33	32	200	45	16			
AHU35-C32-150-3T	3	35	32	150	45	16			
AHU35-C32-200-3T	3	35	32	200	45	16			
AHU40-C32-150-3T	3	40	32	150	45	16			
AHU40-C32-200-3T	3	40	32	200	45	16			


可配用刀片Inserts

型 号 Cat.No			BT015			刀片形状 Insert sharp	尺寸 Size(mm)				
							A	B	T	R	
JDMT100308R-FW	●★	●					11	6.1	3.5	0.8	BWIN
JDMT100304R	●	●★	●		●★		11	6.1	3.5	0.4	
JDMT100308R	●	●★	●	●	●★		11	6.1	3.5	0.8	
JDMT100320R	●	●★					11	6.1	3.5	2.0	
JDMT150504R	●	●	●		●		16	9.12	5	0.4	
JDMT150508R	●	●★	●	●	●★		16	9.12	5	0.8	
JDMT150520R	●	●★					16	9.12	5	2.0	
JDMT150530R	●	●★		●			16	9.12	5	3.0	

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

ASR 快进给立铣刀　　ASR High Feedrate Milling Cutter



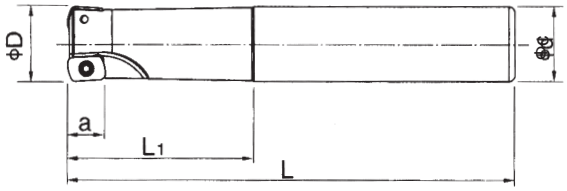



节能提示：
请保留您的报废刀片，ASJ钻铣刀可用，
或联系本公司！


Energy saving tips:
Please keep your scrap blade, ASJ drilling and milling cutter is available, or with your company!

★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
ASR16-C16-120-2T	2	16	16	120	45	10	EPNW0603TN-8 EPMT0603TN-8	M2.5×6	T8
ASR17-C16-120-2T	2	17	16	120	45	10			
ASR16-C16-150-2T	2	16	16	150	45	10			
ASR16-C16-200-2T	2	16	16	200	45	10			
ASR17-C20-150-2T	2	17	20	150	45	10			
ASR17-C20-200-2T	2	17	20	200	45	10			
ASR20-C20-120-2T	2	20	20	120	45	10			
ASR20-C20-150-2T	2	20	20	150	45	10			
ASR20-C20-200-2T	2	20	20	200	45	10			
ASR21-C20-150-2T	2	21	20	150	45	10			
ASR21-C20-200-2T	2	21	20	200	45	10			
ASR25-C25-150-3T	3	25	25	150	45	10			
ASR25-C25-200-3T	3	25	25	200	45	10			
ASR26-C25-150-3T	3	26	25	150	45	10			
ASR26-C25-200-3T	3	26	25	200	45	10			
ASR32-C32-150-4T	4	32	32	150	45	10			
ASR32-C32-200-4T	4	32	32	200	45	10			
ASR33-C32-150-4T	4	33	32	150	45	10			
ASR33-C32-200-4T	4	33	32	200	45	10			
ASR35-C32-150-4T	4	35	32	150	45	10			
ASR35-C32-200-4T	4	35	32	200	45	10			
ASR40-C32-150-4T	4	40	32	150	45	10			
ASR40-C32-200-4T	4	40	32	200	45	10			


可配用刀片 Inserts

型 号 Cat.No								刀片形状 Insert shape	尺寸 Size(mm)				
									R	L	T	W	排屑槽
EPNW0603TN-8	●★	●	●★	●	●	●	●		8	10	3.18	6.35	无
EPMT0603TN-8	●★	●	●★	●	●	●	●		8	10	3.18	6.35	有

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

EMR 通用型圆鼻立铣刀 EMR Universal Round Nose Milling Cutter



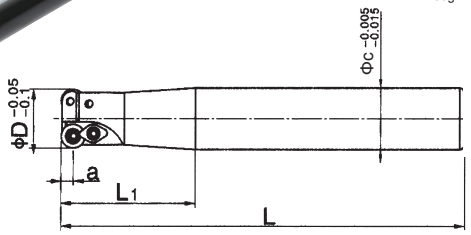




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.


★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

刀片型号08通用型

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a				
EMR 4R10-C10-100-1T	1	10	10	100	35	4				
EMR 4R10-C10-130-1T	1	10	10	130	35	4				
EMR 4R10-C10-150-1T	1	10	10	150	35	4				
EMR 4R11-C10-100-1T	1	11	10	100	35	4				
EMR 4R11-C10-130-1T	1	11	10	130	35	4				
EMR 4R11-C10-150-1T	1	11	10	150	35	4				
EMR 4R12-C12-100-1T	1	12	12	100	35	4				
EMR 4R12-C12-130-1T	1	12	12	130	35	4				
EMR 4R12-C12-150-1T	1	12	12	150	35	4				
EMR 4R13-C12-100-1T	1	13	12	100	35	4				
EMR 4R13-C12-130-1T	1	13	12	130	35	4				
EMR 4R13-C12-150-1T	1	13	12	150	35	4				
EMR 4R16-C15-150-2T	2	16	15	150	40	4				
EMR 4R16-C15-200-2T	2	16	15	200	40	4				
EMR 4R16-C15-250-2T	2	16	15	250	40	4	RPMW 0802 MO			
EMR 4R16-C15-300-2T	2	16	15	300	40	4				
EMR 4R16-C15.6-150-2T	2	16	15.6	150	40	4				
EMR 4R16-C15.6-200-2T	2	16	15.6	200	40	4		A-4R	M3×7	T8 T10
EMR 4R16-C15.6-250-2T	2	16	15.6	250	40	4				
EMR 4R16-C15.6-300-2T	2	16	15.6	300	40	4	RPMT 08T2			
EMR 4R16-C16-120-2T	2	16	16	120	40	4				
EMR 4R16-C16-150-2T	2	16	16	150	40	4	RDMT 08T2			
EMR 4R16-C16-200-2T	2	16	16	200	40	4				
EMR 4R16-C16-250-2T	2	16	16	250	40	4				
EMR 4R16-C16-300-2T	2	16	16	300	40	4				
EMR 4R17-C16-120-2T	2	17	16	120	40	4				
EMR 4R17-C16-150-2T	2	17	16	150	40	4				
EMR 4R17-C16-200-2T	2	17	16	200	40	4				
EMR 4R17-C16-250-2T	2	17	16	250	40	4				
EMR 4R17-C16-300-2T	2	17	16	300	40	4				
EMR 4R20-C19-150-2T	2	20	19	150	50	4				
EMR 4R20-C19-200-2T	2	20	19	200	50	4				
EMR 4R20-C19-250-2T	2	20	19	250	50	4				
EMR 4R20-C19-300-2T	2	20	19	300	50	4				
EMR 4R20-C20-120-2T	2	20	20	120	50	4				
EMR 4R20-C20-150-2T	2	20	20	150	50	4				
EMR 4R20-C20-200-2T	2	20	20	200	50	4				
EMR 4R20-C20-250-2T	2	20	20	250	50	4				
EMR 4R20-C20-300-2T	2	20	20	300	50	4				
EMR 4R21-C20-150-2T	2	20	20	150	50	4				
EMR 4R21-C20-200-2T	2	20	20	200	50	4				
EMR 4R21-C20-250-2T	2	20	20	250	50	4				
EMR 4R21-C20-300-2T	2	20	20	300	50	4				

EMR 圆鼻立铣刀　　EMR Round Nose Milling Cutter

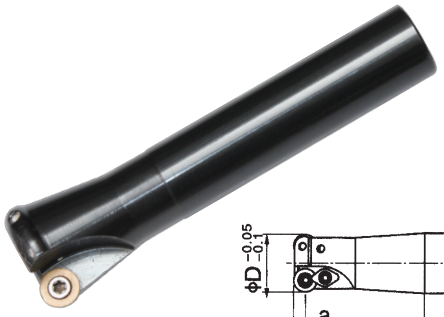

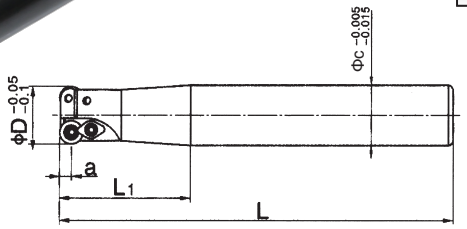





★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a				
EMR 5R20-C19-150-2T	2	20	19	150	45	5	RPMW 1003 MO	A-6R	M4×9 M3.5×10	T15
EMR 5R20-C19-200-2T	2	20	19	200	45	5				
EMR 5R20-C20-150-2T	2	20	20	150	45	5				
EMR 5R20-C20-200-2T	2	20	20	200	45	5				
EMR 5R20-C20-250-2T	2	20	20	250	45	5				
EMR 5R21-C20-150-2T	2	21	20	150	45	5				
EMR 5R21-C20-200-2T	2	21	20	200	45	5				
EMR 5R25-C20-150-2T	2	25	20	150	45	5	RPMW 1003 MO	A-6R	M4×9	T15
EMR 5R25-C20-200-2T	2	25	20	200	45	5				
EMR 5R25-C24-150-2T	2	25	24	150	45	5				
EMR 5R25-C24-200-2T	2	25	24	200	45	5				
EMR 5R25-C24-250-2T	2	25	24	250	45	5				
EMR 5R25-C24-300-2T	2	25	24	300	45	5				
EMR 5R25-C24-350-2T	2	25	24	350	45	5				
EMR 5R25-C25-150-2T	2	25	25	150	45	5				
EMR 5R25-C25-200-2T	2	25	25	200	45	5				
EMR 5R25-C25-250-2T	2	25	25	250	45	5				
EMR 5R25-C25-300-2T	2	25	25	300	45	5				
EMR 5R25-C25-350-2T	2	25	25	350	45	5				
EMR 5R26-C25-150-2T	2	26	25	150	45	5				
EMR 5R26-C25-200-2T	2	26	25	200	45	5				
EMR 5R30-C20-110-2T	2	30	20	110	45	5				
EMR 5R30-C25-150-2T	2	30	25	150	45	5				
EMR 5R30-C25-200-2T	2	30	25	200	45	5				
EMR 5R30-C25-250-2T	2	30	25	250	45	5				
EMR 5R30-C25-300-2T	2	30	25	300	45	5				
EMR 5R30-C25-350-2T	2	30	25	350	45	5				
EMR 5R32-C32-150-3T	3	32	32	150	45	5				
EMR 5R32-C32-200-3T	3	32	32	200	45	5				
EMR 5R32-C32-250-3T	3	32	32	250	45	5				
EMR 5R33-C32-150-3T	3	33	32	150	45	5				
EMR 5R33-C32-200-3T	3	33	32	200	45	5				
EMR 5R35-C32-150-3T	3	35	32	150	45	5				
EMR 5R35-C32-200-3T	3	35	32	200	45	5				
EMR 5R35-C32-250-3T	3	35	32	250	45	5				
EMR 5R35-C32-300-3T	3	35	32	300	45	5				
EMR 5R35-C32-350-3T	3	35	32	350	45	5				
EMR 5R35-C32-400-3T	3	35	32	400	45	5				
EMR 5R35-C32-450-3T	3	35	32	450	45	5				
EMR 5R35-C32-500-3T	3	35	32	500	45	5				
EMR 5R40-C32-150-4T	4	40	32	150	45	5				
EMR 5R40-C32-200-4T	4	40	32	200	45	5				
EMR 5R40-C32-250-4T	4	40	32	250	45	5				
EMR 5R40-C32-300-4T	4	40	32	300	45	5				
EMR 5R40-C32-350-4T	4	40	32	350	45	5				

TRS 圆鼻立铣刀　　EMR Round Dowel Milling Cutter

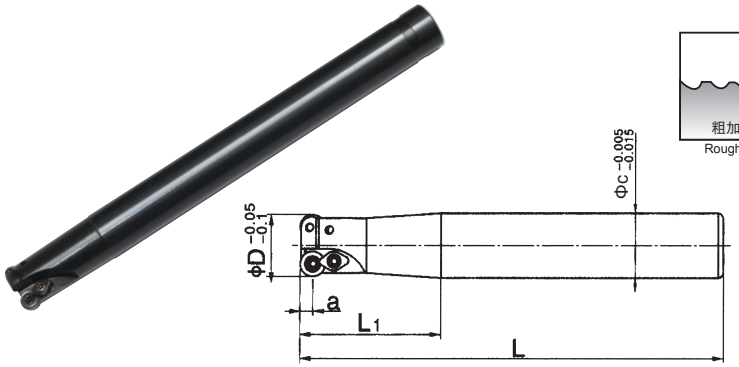




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a				
TRS 5R20-C19-150-2T	2	20	19	150	45	5	RDMT 10T3	A-5R	M4×9 M3.5×10	T15
TRS 5R20-C19-200-2T	2	20	19	200	45	5				
TRS 5R20-C20-150-2T	2	20	20	150	45	5				
TRS 5R20-C20-200-2T	2	20	20	200	45	5				
TRS 5R20-C20-250-2T	2	20	20	250	45	5				
TRS 5R21-C20-150-2T	2	21	20	150	45	5				
TRS 5R21-C20-200-2T	2	21	20	200	45	5				
TRS 5R25-C20-150-2T	2	25	20	150	45	5	RDMT 10T3	A-6R	M4×9	T15
TRS 5R25-C20-200-2T	2	25	20	200	45	5				
TRS 5R25-C24-150-2T	2	25	24	150	45	5				
TRS 5R25-C24-200-2T	2	25	24	200	45	5				
TRS 5R25-C24-250-2T	2	25	24	250	45	5				
TRS 5R25-C24-300-2T	2	25	24	300	45	5				
TRS 5R25-C24-350-2T	2	25	24	350	45	5				
TRS 5R25-C25-150-2T	2	25	25	150	45	5				
TRS 5R25-C25-200-2T	2	25	25	200	45	5				
TRS 5R25-C25-250-2T	2	25	25	250	45	5				
TRS 5R25-C25-300-2T	2	25	25	300	45	5				
TRS 5R25-C25-350-2T	2	25	25	350	45	5				
TRS 5R26-C25-150-2T	2	26	25	150	45	5				
TRS 5R26-C25-200-2T	2	26	25	200	45	5				
TRS 5R30-C20-110-2T	2	30	20	110	45	5				
TRS 5R30-C25-150-2T	2	30	25	150	45	5				
TRS 5R30-C25-200-2T	2	30	25	200	45	5				
TRS 5R30-C25-250-2T	2	30	25	250	45	5				
TRS 5R30-C25-300-2T	2	30	25	300	45	5				
TRS 5R30-C25-350-2T	2	30	25	350	45	5				
TRS 5R32-C32-150-3T	3	32	32	150	45	5				
TRS 5R32-C32-200-3T	3	32	32	200	45	5				
TRS 5R32-C32-250-3T	3	32	32	250	45	5				
TRS 5R33-C32-150-3T	3	33	32	150	45	5				
TRS 5R33-C32-200-3T	3	33	32	200	45	5				
TRS 5R35-C32-150-3T	3	35	32	150	45	5				
TRS 5R35-C32-200-3T	3	35	32	200	45	5				
TRS 5R35-C32-250-3T	3	35	32	250	45	5				
TRS 5R35-C32-300-3T	3	35	32	300	45	5				
TRS 5R35-C32-350-3T	3	35	32	350	45	5				
TRS 5R35-C32-400-3T	3	35	32	400	45	5				
TRS 5R35-C32-450-3T	3	35	32	450	45	5				
TRS 5R35-C32-500-3T	3	35	32	500	45	5				
TRS 5R40-C32-150-4T	4	40	32	150	45	5				
TRS 5R40-C32-200-4T	4	40	32	200	45	5				
TRS 5R40-C32-250-4T	4	40	32	250	45	5				
TRS 5R40-C32-300-4T	4	40	32	300	45	5				
TRS 5R40-C32-350-4T	4	40	32	350	45	5				

EMRW 圆鼻立铣刀　　EMR Round Dowel Milling Cutter



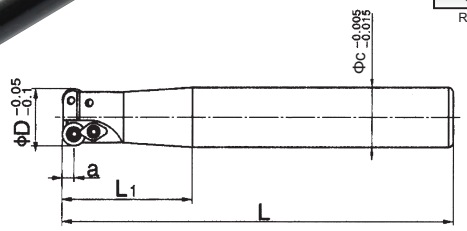




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a				
EMRW 5R20-C19-150-2T	2	20	19	150	45	5	RPMT 10T3	A-5R	M4×9 M3.5×10	T15
EMRW 5R20-C19-200-2T	2	20	19	200	45	5				
EMRW 5R20-C20-150-2T	2	20	20	150	45	5				
EMRW 5R20-C20-200-2T	2	20	20	200	45	5				
EMRW 5R20-C20-250-2T	2	20	20	250	45	5				
EMRW 5R21-C20-150-2T	2	21	20	150	45	5				
EMRW 5R21-C20-200-2T	2	21	20	200	45	5				
EMRW 5R25-C20-150-2T	2	25	20	150	45	5	RPMT 10T3	A-6R	M4×9	T15
EMRW 5R25-C20-200-2T	2	25	20	200	45	5				
EMRW 5R25-C24-150-2T	2	25	24	150	45	5				
EMRW 5R25-C24-200-2T	2	25	24	200	45	5				
EMRW 5R25-C24-250-2T	2	25	24	250	45	5				
EMRW 5R25-C24-300-2T	2	25	24	300	45	5				
EMRW 5R25-C24-350-2T	2	25	24	350	45	5				
EMRW 5R25-C25-150-2T	2	25	25	150	45	5				
EMRW 5R25-C25-200-2T	2	25	25	200	45	5				
EMRW 5R25-C25-250-2T	2	25	25	250	45	5				
EMRW 5R25-C25-300-2T	2	25	25	300	45	5				
EMRW 5R25-C25-350-2T	2	25	25	350	45	5				
EMRW 5R26-C25-150-2T	2	26	25	150	45	5				
EMRW 5R26-C25-200-2T	2	26	25	200	45	5				
EMRW 5R30-C20-110-2T	2	30	20	110	45	5				
EMRW 5R30-C25-150-2T	2	30	25	150	45	5				
EMRW 5R30-C25-200-2T	2	30	25	200	45	5				
EMRW 5R30-C25-250-2T	2	30	25	250	45	5				
EMRW 5R30-C25-300-2T	2	30	25	300	45	5				
EMRW 5R30-C25-350-2T	2	30	25	350	45	5				
EMRW 5R32-C32-150-3T	3	32	32	150	45	5				
EMRW 5R32-C32-200-3T	3	32	32	200	45	5				
EMRW 5R32-C32-250-3T	3	32	32	250	45	5				
EMRW 5R33-C32-150-3T	3	33	32	150	45	5				
EMRW 5R33-C32-200-3T	3	33	32	200	45	5				
EMRW 5R35-C32-150-3T	3	35	32	150	45	5				
EMRW 5R35-C32-200-3T	3	35	32	200	45	5				
EMRW 5R35-C32-250-3T	3	35	32	250	45	5				
EMRW 5R35-C32-300-3T	3	35	32	300	45	5				
EMRW 5R35-C32-350-3T	3	35	32	350	45	5				
EMRW 5R35-C32-400-3T	3	35	32	400	45	5				
EMRW 5R35-C32-450-3T	3	35	32	450	45	5				
EMRW 5R35-C32-500-3T	3	35	32	500	45	5				
EMRW 5R40-C32-150-4T	4	40	32	150	45	5				
EMRW 5R40-C32-200-4T	4	40	32	200	45	5				
EMRW 5R40-C32-250-4T	4	40	32	250	45	5				
EMRW 5R40-C32-300-4T	4	40	32	300	45	5				
EMRW 5R40-C32-350-4T	4	40	32	350	45	5				

EMR TRS EMRW 圆鼻立铣刀 EMR TRS EMRW Indexale Round Dowel Milling Cutter

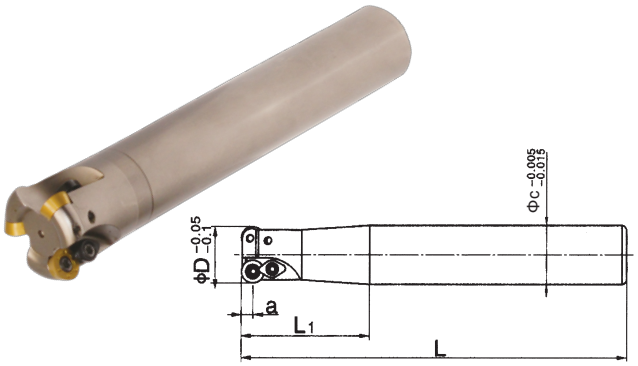





★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm) D	c	L	L1	a	适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
EMR 6R25-C24-150-2T	2	25	24	150	45	6				
EMR 6R25-C24-200-2T	2	25	24	200	45	6				
EMR 6R25-C25-150-2T	2	25	25	150	45	6				
EMR 6R25-C25-200-2T	2	25	25	200	45	6				
EMR 6R26-C25-150-2T	2	26	25	150	45	6				
EMR 6R26-C25-200-2T	2	26	25	200	45	6	RDKT 1204			
EMR 6R30-C25-150-2T	2	30	25	150	45	6				
EMR 6R30-C25-200-2T	2	30	25	200	45	6				
EMR 6R32-C25-150-2T	2	32	25	150	45	6				
EMR 6R32-C25-200-2T	2	32	25	200	45	6	RDMW 1204			
EMR 6R32-C25-250-2T	2	32	25	250	45	6				
EMR 6R32-C32-150-3T	3	32	32	150	45	6				
EMR 6R32-C32-200-3T	3	32	32	200	45	6		A-6R	M4×10	T15
EMR 6R32-C32-250-3T	3	32	32	250	45	6				
EMR 6R32-C32-300-3T	3	32	32	300	45	6	RPMW 1204			
EMR 6R33-C32-150-3T	3	33	32	150	45	6				
EMR 6R33-C32-200-3T	3	33	32	200	45	6				
EMR 6R33-C32-250-3T	3	33	32	250	45	6	RDMT 1204			
EMR 6R33-C32-300-3T	3	33	32	300	45	6				
EMR 6R35-C32-150-3T	3	35	32	150	45	6				
EMR 6R35-C32-200-3T	3	35	32	200	45	6	RPMT 1204			
EMR 6R35-C32-250-3T	3	35	32	250	45	6				
EMR 6R35-C32-300-3T	3	35	32	300	45	6				
EMR 6R35-C32-350-3T	3	35	32	350	45	6				
EMR 6R35-C32-400-3T	3	35	32	400	45	6				
EMR 6R40-C32-150-3T	3	40	32	150	45	6				
EMR 6R40-C32-200-3T	3	40	32	200	45	6				
EMR 6R40-C32-250-3T	3	40	32	250	45	6				
EMR 6R40-C32-300-3T	3	40	32	300	45	6				
EMR 6R40-C32-350-3T	3	40	32	350	45	6				
EMR 6R40-C32-400-3T	3	40	32	400	45	6				

可配用刀片 Inserts


型 号 Cat.No		刀片形状 Insert shape	尺寸 Size(mm) D1	S1	排屑槽
RPMT1204MOE-JS	● ●★ ●★		12	4.76	有
RPMT1204MO	● ● ● ●		12	4.76	有
1204MO-H	● ● ● ● ●		12	4.76	有
RPMW1204MOE	● ● ● ● ●		12	4.76	无
1204MOT	●		12	4.76	无

EMR 圆鼻立铣刀　　EMR Round Dowel Milling Cutter




型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a			
EMR 2.5R10-C10-120-2T	2	10	10	120	35	2.5	RDMW0517	M1.8	T5
EMR 2.5R10-C10-150-2T	2	10	10	150	35	2.5			
EMR 2.5R12-C12-120-2T	2	12	12	120	35	2.5			
EMR 2.5R12-C12-150-2T	2	12	12	150	35	2.5			
EMR 2.5R16-C16-120-2T	2	16	16	120	45	2.5			
EMR 2.5R16-C16-150-2T	2	16	16	150	45	2.5			
EMR 2.5R16-C16-200-2T	2	16	16	200	45	2.5			
EMR 3R16-C15.6-150-2T	2	16	15.6	150	45	3	RDMW0602	M2*6	T6
EMR 3R16-C15.6-200-2T	2	16	15.6	200	45	3			
EMR 3R17-C16-150-2T	2	17	16	150	45	3			
EMR 3R17-C16-200-2T	2	17	16	200	45	3			
EMR 3R20-C20-150-2T	2	20	20	150	45	3			
EMR 3R20-C20-200-2T	2	20	20	200	45	3			
EMR 3R21-C20-150-2T	2	21	20	150	45	3			
EMR 3R21-C20-200-2T	2	21	20	200	45	3			
EMR 3.5R16-C15.6-150-2T	2	16	15.6	150	45	3.5	RDMW0702	M2.5	T8
EMR 3.5R16-C15.6-200-2T	2	16	15.6	200	45	3.5			
EMR 3.5R16-C16-150-2T	2	16	16	150	45	3.5			
EMR 3.5R16-C16-200-2T	2	16	16	200	45	3.5			
EMR 3.5R17-C16-150-2T	2	17	16	150	45	3.5			
EMR 3.5R17-C16-200-2T	2	17	16	200	45	3.5			
EMR 3.5R20-C20-150-2T	2	20	20	150	45	3.5			
EMR 3.5R20-C20-200-2T	2	20	20	200	45	3.5			
EMR 3.5R21-C20-150-2T	2	21	20	150	45	3.5			
EMR 3.5R21-C20-200-2T	2	21	20	200	45	3.5			

可配用刀片 Inserts

型 号 Cat.No		刀片形状 Insert shape	尺寸 Size(mm)			
			D1	S1	排屑槽	
RDMW0517MOEN	●★ ●★		5	1.59	无	
RDMW0702MOEN	●★ ●★		7	2.37	无	
					无	

AJX 快进给立铣刀 AJX High Feedrate Milling Cutter



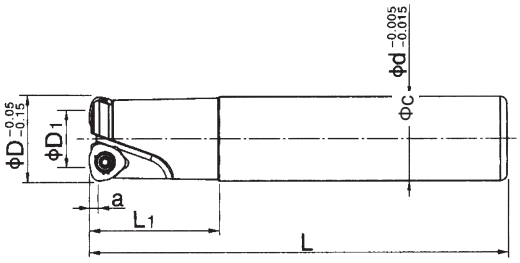




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)						适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	D1	C	L	L1	a				
AJX06-16-C16-120-2T	2	16	8.9	16	120	45	1	JOMT06T215 ZZSR	-	M2.5×6	T8
AJX06-16-C16-150-2T	2	16	8.9	16	150	45	1				
AJX06-16-C16-200-2T	2	16	8.9	16	200	45	1				
AJX06-17-C16-150-2T	2	17	9.9	16	150	45	1				
AJX06-17-C16-200-2T	2	17	9.9	16	200	45	1				
AJX08-20-C20-120-2T	2	20	11.4	20	120	45	1.5	JOMT080320 ZZSR	-	M3×7	T10
AJX08-20-C20-150-2T	2	20	11.4	20	150	45	1.5				
AJX08-20-C20-200-2T	2	20	11.4	20	200	45	1.5				
AJX08-21-C20-150-2T	2	21	12.4	20	150	45	1.5				
AJX08-21-C20-200-2T	2	25	12.4	20	200	45	1.5				
AJX09-25-C25-150-2T	2	25	14.9	25	150	45	2	JOMT09T320 ZSR	CSY-15	M3.5×8.5 M4×10	T15
AJX09-25-C25-200-2T	2	25	14.9	25	200	45	2				
AJX09-25-C25-200-2T	2	25	14.9	25	200	45	2				
AJX09-25-C25-250-2T	2	25	14.9	25	250	45	2				
AJX09-26-C25-150-2T	2	26	15.9	25	150	45	2				
AJX09-26-C25-200-2T	2	26	15.9	25	200	45	2				
AJX09-26-C25-250-2T	2	26	15.9	25	250	45	2				
AJX12-32-C32-150-2T	2	32	20.3	32	150	45	2	JDMT120420 ZSR	AMS-4	M3.5×8.5 M4×10	T15
AJX12-32-C32-200-2T	2	32	20.3	32	200	45	2				
AJX12-32-C32-250-2T	2	32	20.3	32	250	45	2				
AJX12-35-C32-150-2T	2	35	20.3	32	150	45	2				
AJX12-35-C32-200-2T	2	35	20.3	32	200	45	2				
AJX12-35-C32-250-2T	2	35	20.3	32	250	45	2				


可配用刀片 Inserts


型 号 Cat.No				刀片形状 Insert shape	尺寸 Size(mm)				
					B3°	D1	S1	F1	Re
JOMW06T215ZZSR-FT	●	●	●		13	6.35	2.78	1.2	1.5
JOMW080320ZZSR-FT	●	●	●		13	8	3.18	1.4	2
JOMW09T320ZDSR-FT	●	●	●		15	9.525	3.97	1.8	2
JOMW120420ZDSR-FT	●	●★	●		15	12	4.76	5	2
JOMT06T215ZZSR-JM	●	●	●		13	6.35	2.78	1.2	1.5
JOMT080320ZZSR-JM	●	●	●		13	8	3.18	1.4	2
JOMT09T320ZDSR-JM	●	●	●		15	9.525	3.97	1.8	2
JOMT120420ZDSR-ST	●	●	●		15	12	4.76	5	2
JOMT120420ZDSR-JM	●	●	●		15	12	4.76	5	2
JOMT140520ZDSR-FT	●	●	●		15	14	5.76	2.8	2

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

T2139 球形精铣刀 T2139 Spherical Milling Cutter



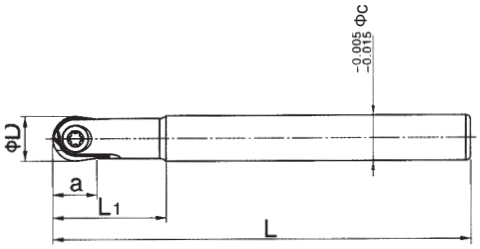




★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.


型 号 Cat.No	尺寸 Size(mm)					适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	L	L1	a			
T2139-4R-100-C10	8	10	100	25	4	P 320□-D08	A30070J-4R	T8
T2139-4R-130-C12	8	12	130	25	4			
T2139-4R-150-C16	8	16	150	25	4			
T2139-5R-120-C10	10	10	120	25	5	P 320□-D10	A40090J-5R	T15
T2139-5R-150-C12	10	12	150	45	5			
T2139-5R-150-C16	10	16	150	45	5			
T2139-6R-130-C12	12	12	130	45	6	P 320□-D12	A60090J-6R	
T2139-6R-150-C12	12	12	150	45	6			
T2139-6R-150-C16	12	16	150	45	6			
T2139-6R-200-C16	12	16	200	45	6			
T2139-8R-150-C16	16	16	150	45	8	P 320□-D16	A50130J-6R	T20
T2139-8R-200-C16	16	16	200	45	8			
T2139-8R-200-C20	16	20	200	45	8			
T2139-8R-250-C25	16	25	250	45	8			
T2139-10R-150-C20	20	20	150	45	10	P 320□-D20	A50165J-10R	
T2139-10R-200-C20	20	20	200	45	10			
T2139-10R-250-C20	20	20	250	45	10			
T2139-10R-300-C32	20	32	300	45	10			
T2139-12.5R-150-C25	25	25	150	45	12.5	P 320□-D25	A60210J-12.5R	
T2139-12.5R-200-C25	25	25	200	45	12.5			
T2139-12.5R-250-C25	25	25	250	45	12.5			
T2139-12.5R-300-C25	25	25	300	45	12.5			
T2139-12.5R-300-C32	25	32	300	45	12.5			
T2139-15R-150-C32	30	32	150	45	15	P 320□-D30	A80250J-16R	T30
T2139-15R-200-C32	30	32	200	45	15			
T2139-15R-250-C32	30	32	250	45	15			
T2139-15R-300-C32	32	32	300	45	15			
T2139-15R-350-C32	32	32	350	45	15			
T2139-16R-150-C32	32	32	150	45	16	P 320□-D32		
T2139-16R-200-C32	32	32	200	45	16			
T2139-16R-250-C32	32	32	250	45	16			
T2139-16R-300-C32	32	32	300	45	16			
T2139-16R-350-C32	32	32	350	45	16			

可配用刀片 Inserts

型 号 Cat.No	BT015									刀片形状 Insert shape	尺寸 Size(mm)				
											DC	D1	L1	S	
P320□-D08	●	●	●★	●	●	●★	●	●	●		8	3	4	2.0	BWIN
-D10	●★	●	●	●	●	●★	●	●	●		10	4	5	2.5	
-D12	●★	●	●	●	●	●★	●	●	●		12	5	6	2.5	
-D16	●★	●	●	●	●	●★	●	●	●		16	5	6	3.0	
-D20	●★	●	●	●	●	●★	●	●	●		20	5	6	3.0	
-D25	●★	●	●	●	●	●★	●				25	6	9	4.0	
-D30	●	●	●	●	●		●				30	8	10	5.0	
-D32	●	●	●	●	●		●				32	8	10	5.0	

BCF BCFL 球形立铣刀　BCF BCFL Spherical Milling Cutter



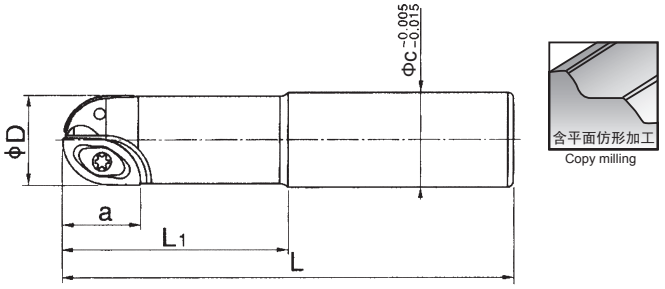

★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.


型 号 Cat.No	尺寸 Size(mm)					适用刀片 Applicable Inserts			螺钉 Clamp screw	扳手 Wrench
	D	c	L	L1	a	亲 刃	子 刃	外周刃		
BCF-10R-150-C20/C25	20	20	150	70		ZCEW\T 100CE	ZCEW\T 100SE	CPMT 080204	M3×9.5 M2.5×6	T10/T8
BCF-10R-200-C25	20	25	200	70						
BCF-10R-250-C25	20	25	250	80						
BCF-10R-300-C25	20	25	300	80						
BCF-12.5R-150-C25	25	25	150	80						
BCF-12.5R-200-C25/C32	25	32	200	100						
BCF-12.5R-250-C32	25	32	250	150						
BCF-12.5R-300-C32	30	32	300	150						
BCF-15R-160-C32	30	32	160	150						
BCF-15R-200-C32	30	32	200	150						
BCF-15R-250-C32	30	32	250	150						
BCF-15R-300-C32	30	32	300	-						
BCF-15R-350-C32	30	32	350	70						
BCF-16R-160-C32	32	32	160	70		ZCEW\T 125CE	ZCEW\T 125SE	CPMT 090308	M4×9 M4×11	T15
BCF-16R-200-C32	32	32	200	80						
BCF-16R-250-C32	32	32	250	80						
BCF-16R-300-C32	32	32	300	80						
BCF-16R-350-C32	32	32	350	100						
BCF-20R-200-C42	40	42	200	150						
BCF-20R-250-C42	40	42	250	150						
BCF-20R-300-C42	40	42	300	150						
BCF-20R-350-C42	40	42	350	-						
BCF-20R-200-MT5	40	MT5	200	80						
BCF-20R-250-MT5	40	MT5	250	100						
BCF-25R-200-C50.8	50	50.8	200	100		ZCEW\T 250CE	ZCEW\T 250SE	CPMT 120408	M6×18 M5×12	T20 T15
BCF-25R-250-C50.8	50	50.8	250	150						
BCF-25R-300-C50.8	50	50.8	300	200						
BCF-25R-350-C50.8	50	50.8	350	-						
BCF-25R-400-C50.8	50	50.8	400	80						
BCF-25R-200-MT5	50	MT5	200	100						
BCF-25R-250-MT5	50	MT5	250	150						


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

型 号 Cat.No	尺寸 Size(mm)					适用刀片 Applicable Inserts			螺钉 Clamp screw	扳手 Wrench
	D	c	L	L1	a	亲 刃	子 刃	外周刃		
BCFL-10R-150-C20	20	20	150	70		ZCEW\T 100CE	ZCEW\T 100SE	CPMT 080204	M3×9.5 M2.5×6	T10/T8
BCFL-10R-150-C25	20	25	150	70						
BCFL-10R-200-C25	20	25	200	80						
BCFL-10R-250-C25	20	25	250	80						
BCFL-10R-300-C32	20	32	300	80						
BCFL-12.5R-150-C25	25	25	150	100						
BCFL-12.5R-200-C25	25	25	200	150						
BCFL-12.5R-200-C32	25	32	200	150						
BCFL-12.5R-250-C32	25	32	250	150						
BCFL-12.5R-300-C32	25	32	300	150						
BCFL-15R-160-C32	30	32	160	150						
BCFL-15R-200-C32	30	32	200	-						
BCFL-15R-250-C32	30	32	250	70						
BCFL-15R-300-C32	30	32	300	70		ZCEW\T 125CE	ZCEW\T 125SE	CPMT 090308	M4×9 M4×11	T15
BCFL-15R-350-C32	30	32	350	80						
BCFL-16R-160-C32	32	32	160	80						
BCFL-16R-200-C32	32	32	200	80						
BCFL-16R-250-C32	32	32	250	100						
BCFL-16R-300-C32	32	32	300	150						
BCFL-16R-350-C32	32	32	350	150						
BCFL-20R-200-C42	40	42	200	150						
BCFL-20R-250-C42	40	42	250	-						
BCFL-20R-300-C42	40	42	300	80						
BCFL-20R-350-C42	40	42	350	100						
BCFL-20R-200-MT5	40	MT5	200	100		ZCEW\T 250CE	ZCEW\T 250SE	CPMT 120408	M6×18 M5×12	T20 T15
BCFL-20R-250-MT5	40	MT5	250	150						
BCFL-25R-200-C50.8	50	50.8	200	200						
BCFL-25R-250-C50.8	50	50.8	250	-						
BCFL-25R-300-C50.8	50	50.8	300	80						
BCFL-25R-350-C50.8	50	50.8	350	100						
BCFL-25R-400-C50.8	50	50.8	400	150						
BCFL-25R-200-MT5	50	MT5	200	100						
BCFL-25R-250-MT5	50	MT5	250	150						

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TP 台肩壳形铣刀 TP Shoulder Milling Cutter

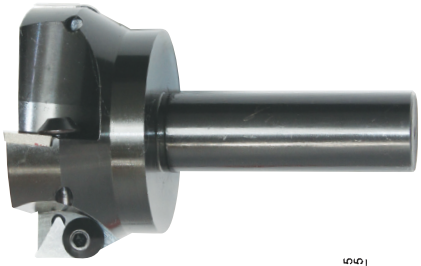

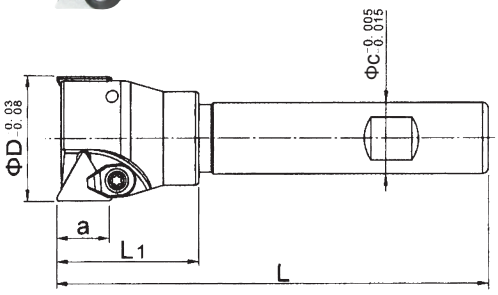



★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)					适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
		D	c	L	L1	a				
TP16-30-C20-100-2T	2	30	20	100	45	14	TPMN1603 TPKN1603	AMS-4	M4×10	T15
TP16-32-C20-100-2T	2	32	20	100	45	14				
TP16-35-C20-100-2T	2	35	20	100	45	14				
TP16-35-C25-110-2T	2	35	25	110	45	14				
TP16-40-C20-110-3T	3	40	20	110	45	14				
TP16-40-C25-110-3T	3	40	25	110	45	14				
TP16-40-C25-110-3T	3	40	25	110	45	14				
TP22-50-C20-110-3T	3	50	20	110	42	20				
TP22-50-C25-110-3T	3	50	25	110	42	20				
TP22-50-C32-115-3T	4	50	32	115	42	20	TPMN2204 TPKN2204 XPKR220412 XPKN220408	CSY-20	M5×11	T20
TP22-63-C20-115-4T	4	63	20	115	42	20				
TP22-63-C25-115-4T	4	63	25	115	42	20				
TP22-63-C32-115-4T	4	63	32	115	42	20				
TP22-80-C20-120-5T	5	80	20	120	42	20				
TP22-80-C25-120-5T	5	80	25	120	42	20				
TP22-80-C32-120-5T	5	80	32	120	42	20				

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TPKN 1603PDR
BT015





TPKN 2204PDR
BT015



KM 45 ° 立铣刀　KM 45° Milling Cutter



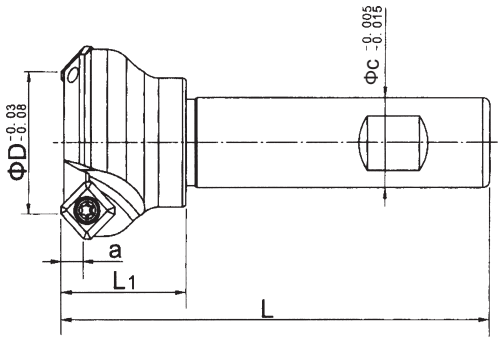





★ 采用抗震性工具钢材质。
Using tool steel material vibration resistance.

★ 整体预硬后，再行精修，避免二次所产生应变。
Overall after hard, any refinement, avoid secondary produced by the strain.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm) D	c	L	L1	a	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
KM09-25-C20-120-2T	2	25	20	120	-	4.5	SEEX09T3	M3×7	T8
KM09-25-C25-120-2T	2	25	25	120	32	4.5			
KM09-32-C25-120-2T	2	32	25	120	-	4.5			
KM09-32-C32-120-2T	2	32	32	120	32	4.5			
KM12-32-C20-120-2T	2	32	20	120	-	6	SEHT1204	M5×11	T20
KM12-32-C25-120-2T	2	32	25	120	-	6			
KM12-32-C32-120-2T	2	32	32	120	-	6			
KM12-40-C20-120-3T	3	40	20	120	-	6			
KM12-40-C25-120-3T	3	40	25	120	-	6			
KM12-40-C32-120-3T	3	40	32	120	-	6			
KM12-50-C25-120-4T	4	50	25	120	35	6			
KM12-50-C32-120-4T	4	50	32	120	35	6			
KM12-63-C25-120-4T	4	63	25	120	35	6			
KM12-63-C32-120-4T	4	63	32	120	35	6			

可配用刀片　Inserts

型 号 Cat.No	BT015	刀片形状 Insert shape	尺寸Size(mm) D1	S1	排屑槽
SEHT1204AFN	● ● ● ● ● ●		12.7	4.76	有
1204AFN-K88	●		12.7	4.76	有
SEHW1204AFN	● ● ● ● ● ● ● ●		12.7	4.76	无
SECA1204AFSN	● ●		12.7	4.76	无
1204AFTN	● ● ●		12.7	4.76	无
1204AFFN	● ● ●		12.7	4.76	无
1204AFEN	●		12.7	4.76	无
SEHT1204AFFN-M	●		12.7	4.76	无


型 号 Cat.No	BT015	刀片形状 Insert shape	尺寸Size(mm) D1	S1	排屑槽
SEET1204AFSN-M01	●		12.7	4.76	有
1204AFFN-F01	●		12.7	4.76	有
SEHT1204AF4B	● ●		12.7	4.76	有
1204AFFN	●		12.7	4.76	有
SEHW1204AFN	●		12.7	4.76	无

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

SSP 45° 定位倒角刀 SSP 45° Spot Chamfer Milling Cutter





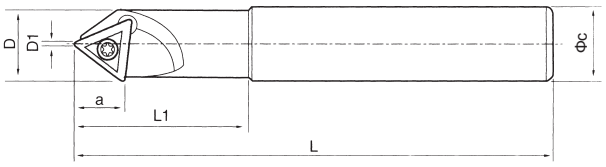


特点：
本铣刀可45° 切削，亦可做倒角，可中心定位钻使用。
适合一般铣床，CNC铣床，CNC车刀，钻床倒角。
Features:
The cutter can be 45 ° cutting, can also do the chamfer, it can locate center drill is used. Suitable for general milling machine, CNC milling machine, CNC lathe tool, drill chamfering.

型 号 Cat.No	尺寸 Size(mm)					倒角范围 Chamfering range	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	L	L1	a				
SSP12-12-130-1T	12	12	130	20	7.3		TCMX1104	M2.5*6	T8
SSP20-20-130-1T	20	20	130	20	11.3	0-20	TCMX16T3	M4*9	T15
SSP20-20-150-1T	20	20	130	20	11.3				
SSP20-20-200-1T	20	20	130	20	11.3				
SSP25-20-130-1T	25	20	130	20	11.3				
SSP30-20-130-1T	30	20	130	20	11.3				
SSP32-25-130-1T	32	25	130	20	11.3				

SSK 45° 舍弃式倒角刀 SSK 45° Thorw-away Chamfer Milling Cutter





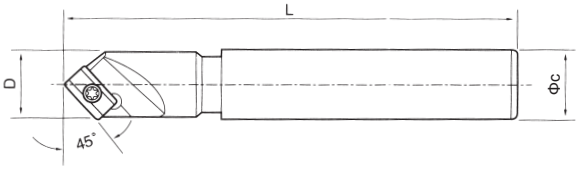

特点：
本铣刀可45° 切削，亦可做倒角。
适合一般铣床，综合切削中心机。
Features:
The cutter can be 45 ° cutting, can also do the chamfer. Suitable for general milling machine, cutting machine center.

型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)			倒角范围 Chamfering range	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L				
SSK16-12-120-1T	1	16	12	120	3-20	ADNT160308	M4*9	T15
SSK16-16-120-1T	1	16	16	120				
SSK20-20-130-1T	1	20	20	130				
SSK20-20-150-1T	1	20	20	130				


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.


TP 45 ° 倒角刀 TP 45° Chamfer Milling Cutter




型 号 Cat.No	刃数 No.of flutes	尺寸 Size(mm)			倒角范围 Chamfering range	适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
		D	c	L				
TP45°-20-C20-120-1T	1	20	20	120				
TP45°-30-C20-120-2T	2	30	20	120				
TP45°-32-C20-130-2T	2	32	20	130				


TAP 粗切削直柄玉米铣刀 TAP Roughing Cut Corn Milling Cutter

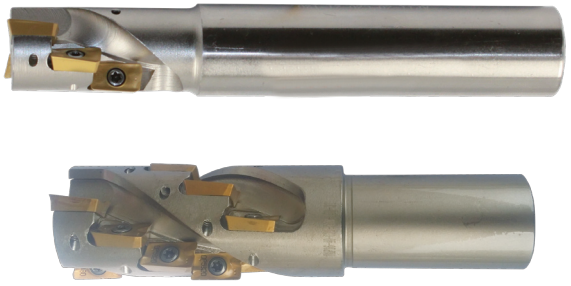

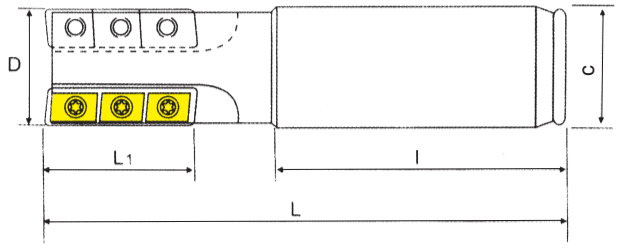

型 号 Cat.No	刃数 No.of flutes	D	c	L	l	L1	刀片数 Blade number	适用刀片 Applicable inserts	刀片螺丝 blade screw	扳手 Wrench
TAP-20AP11-C20-28M-2T-120	2	20	20	120	60	28	6	AP1135 AP1604	RS-010-M4 RS-010-M2.5	T15
TAP-25AP11-C25-38M-2T-130	2	25	25	130	60	38	8			
TAP-20AP11-C20-48M-2T-130	2	20	20	130	60	48	10			
TAP-25AP11-C25-48M-2T-130	2	25	25	130	60	48	10			
TAP-32AP11-C32-48M-3T-140	3	32	32	140	60	48	15			
TAP-32AP16-C32-70M-2T-150	2	32	32	150	70	70	14			
TAP-40AP16-C32-70M-2T-150	2	40	32	150	70	70	14			
TAP-40AP16-C32-70M-3T-150	3	40	32	150	70	70	15			
TAP-50AP16-C32-70M-3T-150	3	50	32	150	70	70	15			
TAP-50AP16-C32-100M-3T-150	3	50	32	150	70	100	21			

型 号 Cat.No	BT015	BT065	BM035	刀片形状 Insert sharp	尺寸 Size(mm) L1	L2	S1	F1	Re	
APMT1135PDER-H2	●	●	●★		11	6.35	3.5	1.5	0.4	BWIN
					11	6.35	3.5	1.2	0.8	
					11	6.35	3.5	0.8	1.2	
					11	6.35	3.5	0.4	1.6	
					11	6.35	3.5	0.4	2.4	
					11	6.35	3.5	1.8	0.2	
					11	6.35	3.5	1.5	0.4	
APMT1135PDER-M2	●	●	●★		11	6.35	3.5	1.2	0.8	
APMT1135PDER-G2					11	6.35	3.5	1.2	0.8	


型 号 Cat.No	BT015	BT065	BM035	刀片形状 Insert sharp	尺寸 Size(mm) L1	L2	S1	F1	Re	
APMT1604PDER-H2	●	●	●★		16.5	9.525	4.76	1.7	0.4	BWIN
					16.5	9.525	4.76	1.7	0.8	
					16.5	9.525	4.76	1.7	1.6	
					16.5	9.525	4.76	1.7	2.4	
					16.5	9.525	4.76	1.7	3.2	
APMT1604PDER-M2	●	●	●★		16.5	9.525	4.76	1.7	0.8	
APMT1604PDER-G2	●				16.5	9.525	4.76	1.7	0.8	
APMT1604PDSR					16.4	9.525	4.76	-	0.8	
APMT1604PDERMA2					16.4	9.525	4.76	-	0.8	


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TAP 直角台肩壳形铣刀 TAP Right Angle Shoulder Face Mill

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300







节能提示：
请保留您的报废刀片，RAP–75° 壳形铣刀还能用，或联系本公司！

Energy saving tips:
Please keep your scrap blade, RAP – 75 ° shell cutter can also be used, or with your company!

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
TAP 300R40-16-4T	40	16	42	8.5	5	11	APMT 1135 PDER	M2.5×6	T8
TAP 300R40-22-4T	40	22	50	10.4	6.3	11			
TAP 300R50-22-4T	50	22	50	10.4	6.3	11			
TAP 300R50-22-5T	50	22	50	10.4	6.3	11			
TAP 300R63-22-4T	63	22	50	10.4	6.3	11			
TAP 300R63-22-5T	63	22	50	10.4	6.3	11			
TAP 300R80-27-6T	80	27	50	12.4	7	11			
TAP 300R100-32-6T	100	32	50	14.4	8	11			
TAP 300R125-40-6T	125	40	60	16.4	9	11			
TAP 400R40-16-3T	40	16	42	8.5	5	16	APMT 1604 PDER	M4×9	T15
TAP 400R40-16-4T	40	16	42	8.5	5	16			
TAP 400R40-22-3T	40	22	50	10.4	6.3	16			
TAP 400R50-22-4T	50	22	50	10.4	6.3	16			
TAP 400R63-22-4T	63	22	50	10.4	6.3	16			
TAP 400R63-22-5T	63	22	50	10.4	6.3	16			
TAP 400R80-27-5T	80	27	50	12.4	7	16			
TAP 400R80-27-6T	80	27	50	12.4	7	16			
TAP 400R100-32-6T	100	32	50	14.4	8	16			
TAP 400R125-40-6T	125	40	60	16.4	9	16			
TAP 400R125-40-7T	125	40	60	16.4	9	16			
TAP 400R160-40-8T	160	40	60	16.4	9	16			
TAP 400R200-60-10T	200	60	60	26.3	14	16			
TAP 400R250-60-12T	250	60	60	26.3	14	16			
TAP 400R315-60-16T	315	60	60	26.3	14	16			
TAP 400R350-60-18T	350	60	60	26.3	14	16			
TAP 400R400-60-18T	400	60	60	26.3	14	16			

可配用刀片 Inserts


型 号 Cat.No	BT015	BT065	BM035																	刀片形状 Insert sharp	尺寸 Size(mm) L1	L2	S1	F1	Re	
APMT1135PDER-H2																					11	6.35	3.5	1.2	0.8	
APMT1135PDER-M2	●	●	●★	●	●	●	●	●													11	6.35	3.5	1.2	0.8	
																					11	6.35	3.5	0.8	1.2	
																					11	6.35	3.5	0.4	1.6	
																					11	6.35	3.5	0.4	2.4	
APMT1604PDER-H2																					16.5	9.525	4.76	1.7	0.8	
APMT1604PDER-M2	●	●	●★			●															16.5	9.525	4.76	1.7	0.8	
APMT1135PDER-G2								●													11	6.35	3.5	1.2	0.8	


BWIN

AHUB 直角台肩壳形面铣刀盘　AHUB Right Angle Face Milling Cutter

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300






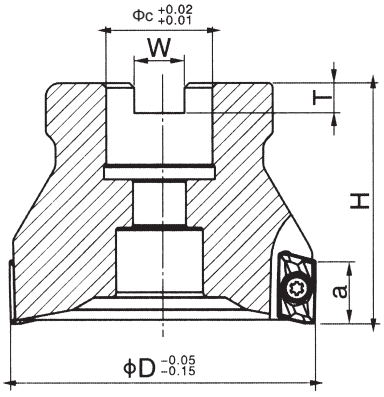

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
AHUB 15-50-22-4T	50	22	50	10.4	6.3	16	JDMT 1505 R	M4×9	T15
AHUB 15-63-22-4T	63	22	50	10.4	6.3	16			
AHUB 15-63-22-5T	63	22	50	10.4	6.3	16			
AHUB 15-80-27-6T	80	27	50	12.4	7	16			
AHUB 15-100-32-6T	100	32	50	14.4	8	16			
AHUB 15-125-40-6T	125	40	50	16.4	9	16			
AHUB 15-160-40-8T	160	40	50	16.4	9	16			
AHUB 15-200-60-10T	200	60	60	26.3	14	16			
AHUB 15-250-60-12T	250	60	60	26.3	14	16			
AHUB 15-50-25.4-4T	50	25.4	50	10.4	6.3	16			
AHUB 15-63-25.4-4T	63	25.4	50	10.4	6.3	16			
AHUB 15-63-25.4-5T	63	25.4	50	10.4	6.3	16			
AHUB 15-80-25.4-6T	80	25.4	50	12.4	7	16			
AHUB 15-100-31.75-6T	100	31.75	50	14.4	8	16			
AHUB 15-125-38.1-6T	125	38.1	60	16.4	9	16			

可配用刀片 Inserts


型 号 Cat.No	BT015				刀片形状 Insert sharp	尺寸 Size(mm)				
						A	B	T	R	
JDMT150504R	●	●		●		16	9.12	5	0.4	BWIN
JDMT150508R	●★	●	●	●★		16	9.12	5	0.8	
JDMT150520R	●★					16	9.12	5	2.0	
JDMT150530R	●★		●			16	9.12	5	3.0	


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

EMR 5R 圆鼻铣刀 不通用　EMR Round Nose Face Milling Cutter

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300






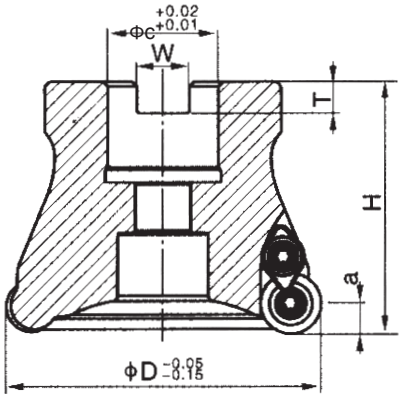


特点：
使用11°、15°刀片通用；
圆刀片切削刃强度高；
多功能面铣刀；
最适合加工模具等工件。

Features:
Using 11°, 15° blade gm;
Round the blade cutting edge intensity is high;
Multi-functional face milling cutter;
The most suitable artifacts, such as processing mould.

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
5R40-16-4T	40	16	42	8.5	5	5	PRMW 1003 MO REMW 10T3 MO	M4×9	T15
5R40-22-4T	40	22	42	8.5	5	5			
5R50-22-4T	50	22	50	10.4	6.3	5			
5R63-22-4T	63	22	50	10.4	6.3	5			
5R63-22-5T	63	22	50	10.4	6.3	5			
5R80-27-5T	80	27	50	12.4	7	5			
5R80-27-6T	80	27	50	12.4	7	5			
5R100-32-6T	100	32	50	14.4	8	5			
5R125-40-6T	125	40	60	16.4	9	5			
5R160-40-8T	160	40	60	16.4	9	5			
5R200-60-10T	200	60	60	26.3	14	5			
5R250-60-12T	250	60	60	26.3	14	5			


可配用刀片　Inserts


型 号 Cat.No	BT015														刀片形状 Insert shape	尺寸 Size(mm)			
																D1	S1	排屑槽	
RPMT1204MOE-JS	●	●★	●★													12	4.76	有	
RPMT1204MO							●	●	●	●						12	4.76	有	
1204MO-H						●	●	●	●	●						12	4.76	有	
RPMW1204MOE	●	●		●	●	●										12	4.76	无	
1204MOT			●													12	4.76	无	

TRS EMRW 5R 圆鼻铣刀 通用　TRS ERMR 5R Round Nose Face Milling Cutter

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300








特点：
使用11°、15°刀片通用；
圆刀片切削刃强度高；
多功能面铣刀；
最适合加工模具等工件。

Features:
Using 11°, 15° blade gm;
Round the blade cutting edge intensity is high;
Multi–functional face milling cutter;
The most suitable artifacts, such as processing mould.

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
5R40-16-4T	40	16	42	8.5	5	5	RPMT 10T3 MO RDMT 10T3 MO	M4×9	T15
5R40-22-4T	40	22	42	10.4	6.3	5			
5R50-22-4T	50	22	50	10.4	6.3	5			
5R63-22-4T	63	22	50	10.4	6.3	5			
5R63-22-5T	63	22	50	10.4	6.3	5			
5R80-27-5T	80	27	50	12.4	7	5			
5R80-27-6T	80	27	50	12.4	7	5			
5R100-32-6T	100	32	50	14.4	8	5			
5R125-40-6T	125	40	60	16.4	9	5			
5R160-40-8T	160	40	60	16.4	9	5			
5R200-60-10T	200	60	60	26.3	14	5			
5R250-60-12T	250	60	60	26.3	14	5			

可配用刀片 Inserts


型 号 Cat.No	BT015																		刀片形状 Insert shape	尺寸 Size(mm)			
																				D1	S1	排屑槽	
PMW1003MO	●	●	●																	10	3.18	无	
PMT10T3MOE				●	●															10	3.97	有	
PMW1003MOEN						●★	●★													10	3.18	无	
PMW1003MO								●	●	●	●	●	●							10	3.18	无	


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

EMR TRS EMRW 6R 圆鼻铣刀 通用 EMR TRS ERMR 6R Round Nose Face Mill

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300






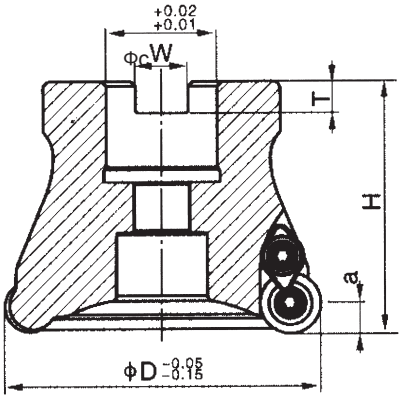


特点：
使用11°、15°刀片通用；
圆刀片切削刃强度高；
多功能面铣刀；
最适合加工模具等工件。

Features:
Using 11 °, 15 ° blade gm;
Round the blade cutting edge intensity is high;
Multi–functional face milling cutter;
The most suitable artifacts, such as processing mould.

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
6R40-16-3T	40	16	42	8.5	5	6			
6R50-22-4T	50	22	50	10.4	6.3	6			
6R63-22-4T	63	22	50	10.4	6.3	6			
6R63-22-5T	63	22	50	10.4	6.3	6			
6R80-27-5T	80	27	50	12.4	7	6	RPMW1204MO		
6R80-27-6T	80	27	50	12.4	7	6		M4×10	T15
6R100-32-6T	100	32	50	14.4	8	6	RPMT1204MO		
6R125-40-6T	125	40	60	16.4	9	6			
6R160-40-8T	160	40	60	16.4	9	6	RDMT1204MO		
6R200-60-10T	200	40	60	26.3	14	6			
6R250-60-12T	250	40	60	26.3	14	6			


可配用刀片 Inserts


型 号 Cat.No	BT015															刀片形状 Insert shape	尺寸 Size(mm)			
																	D1	S1	排屑槽	
RPMT1204MOE–JS	●	●★	●★														12	4.76	有	
RPMT1204MO							●	●	●	●							12	4.76	有	
1204MO–H						●	●	●	●	●							12	4.76	有	
RPMW1204MOE	●	●		●	●	●											12	4.76	无	
1204MOT			●														12	4.76	无	

EMR TRS EMRW 8R 圆鼻铣刀 RCKT不通用 EMR TRS ERMR 8R Round Nose Mill

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300





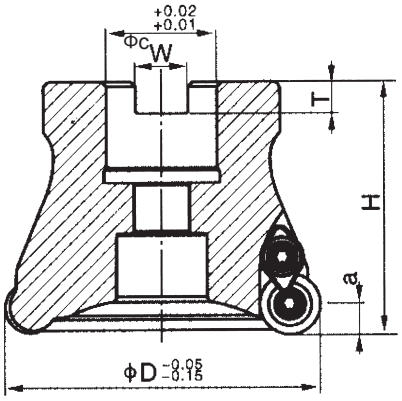

特点：
使用11°、15°刀片通用；
圆刀片切削刃强度高；
多功能面铣刀；
最适合加工模具等工件。

Features:
Using 11°, 15° blade gm;
Round the blade cutting edge intensity is high;
Multi–functional face milling cutter;
The most suitable artifacts, such as processing mould.






型号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
8R50-22-3T	50	22	50	10.4	6.3	8	RCHT1605MO RDMT1605MO RDMW1605MO RDMT1605MO RPMW1605MO	M5*12	T20
8R63-22-4T	63	22	50	10.4	6.3	8			
8R80-27-5T	80	27	50	12.4	7	8			
8R100-32-6T	100	32	50	14.4	8	8			
8R125-40-6T	125	40	50	16.4	9	8			
8R160-40-7T	160	40	50	16.4	9	8			
8R200-60-9T	200	60	60	26.3	14	8			
8R250-60-10T	250	60	60	26.3	14	8			

10R 圆鼻铣刀盘　不通用

型号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
10R63-22-3T	63	22	50	10.4	6.3	10	RCHT2006MO RDMT2006MO RDMT2006MO RDMW2006MO RPMT2006MO RPMW2006MO	M6×12	T20
10R80-27-4T	80	27	50	12.4	7	10			
10R100-32-5T	100	32	50	14.4	8	10			
10R125-40-5T	125	40	60	16.4	9	10			
10R160-40-6T	160	40	60	16.4	9	10			
10R200-60-8T	200	60	60	26.3	14	10			
10R250-60-10T	250	60	60	26.3	14	10			
10R315-60-12T	315	60	60	26.3	14	10			
10R350-60-13T	350	60	60	26.3	14	10			

部份常备特价刀片 Part or special blade

产品型号 — 圆弧头仿型铣刀 The product model – arc type milling cutter head imitation

刀片外形 Inserts Shape	型 号 Type	涂层牌号 Coated Grades			尺寸(mm) Dimension			刀片形状 CAD Shape
					D	S	d1	
	RCHT10T3MO	●	○	○	10	3.97	4	
	RCHT1204MO	●	●		12	4.76	4	
	RCHT1605MO	○	●	●	16	5.56	4	
	RCHT2006MO	○	●	●	20	6.35	6.5	
	RDMT10T3MO	●	○		10	3.97	4.4	
	RDMT1204MO	●	●		12	4.76	4.4	
	RDMT1605MO	○	●	●	16	5.56	5.5	
	RDMT2006MO	○	●	●	20	6.35	6.5	
	RDMW10T3MO	●	○	○	10	3.97	4.4	
	RDMW1204MO	●	●	○	12	4.76	4.4	
	RDMW1605MO	○	○	●	16	5.56	5.5	
	RDMW2006MO	○	○	●	20	6.35	6.5	
	RPMT0803MO	●	○		8	3.18	3.4	
	RPMT1204MO	●	●	○	12	4.76	4.4	
	RPMT1605MO	○	●	●	16	5.56	5.5	
	RPMT2006MO		●	●	20	6.35	6.5	
	RPMW0803MO	●	○		8	2.78	3.4	
	RPMW1003MO		○	●	10	3.97	4.4	
	RPMW1204MO	●	●	○	12	4.76	4.4	
	RPMW1605MO		○	●	16	6.35	5.5	

●标准库存 Stock ○ 需预订 Order


注：以上刀片和配套刀杆、刀盘库存丰富，交货迅速。


Note: the above blade and supporting rod, the knife dish rich inventory, prompt delivery.

TR200 圆鼻壳形铣刀盘　TR200 Round Dowel Face Mill

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300








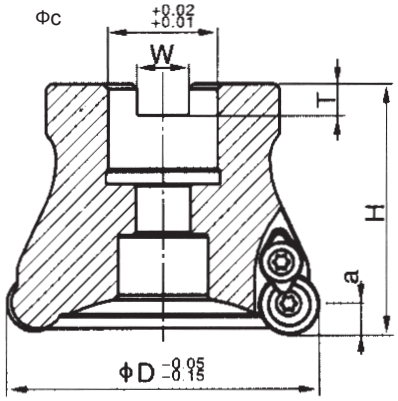

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
5R50-22-4T	50	22	50	10.4	6.3	5	RCKT10T3MO	M4×9	T15
5R63-22-4T	63	22	50	10.4	6.3	5			
5R63-22-5T	63	22	50	10.4	6.3	5			
5R80-27-5T	80	27	50	12.4	7	5			
5R80-27-6T	80	27	50	12.4	7	5			
5R100-32-6T	100	32	50	14.4	8	5			
5R125-40-6T	125	40	60	16.4	9	5			
5R160-40-8T	160	40	60	16.4	9	5			
5R200-60-10T	200	60	60	26.3	14	5			
5R250-60-12T	250	60	60	26.3	14	5			
6R50-22-4T	50	22	50	10.4	6.3	6			
6R63-22-4T	63	22	50	10.4	6.3	6			
6R63-22-5T	63	22	50	10.4	6.3	6			
6R80-27-5T	80	27	50	12.4	7	6			
6R80-27-6T	80	27	50	12.4	7	6			
6R100-32-6T	100	32	50	14.4	8	6	RCKT1204MO		
6R125-40-6T	125	40	60	16.4	9	6			
6R160-40-8T	160	40	60	16.4	9	6			
6R200-60-10T	200	60	60	26.3	14	6			
6R250-60-12T	250	60	60	26.3	14	6			

可配用刀片 Inserts

型 号 Cat.No																	刀片形状 Insert shape	尺寸 Size(mm) D1	d1	S1
RCHT10T3MO-PL	●	●									●							10	4.0	3.97
10T3MO-KL											●							10	4.0	3.97
10T3MO-ML			●	●														10	4.0	3.97
RCHT1204MO-PL	●	●									●							12	4.0	4.76
1204MO-KL											●							12	4.0	4.76
1204MO-ML			●	●														12	4.0	4.76
RCHT1606MO-PL	●	●									●							16	5.5	6.35
1606MO-KL											●							16	5.5	6.35
1606MO-ML			●	●														16	5.5	6.35
RCKT10T3MO-PM							●	●	●									10	4.0	3.97
10T3MO-KM					●	●												10	4.0	3.97
10T3MO-WM	●									●		●						10	4.0	3.97
10T3MO-MM			●	●														10	4.0	3.97
RCKT1204MO-PM							●	●	●									12	4.0	4.76
1204MO-KM					●	●												12	4.0	4.76
1204MO-WM	●									●		●						12	4.0	4.76
1204MO-MM			●	●														12	4.0	4.76
RCKT1606MO-PM							●	●	●									16	5.5	6.35
1606MO-KM					●	●												16	5.5	6.35
1606MO-WM	●									●		●						16	5.5	6.35
1606MO-MM			●	●														16	5.5	6.35
RCKT10T3MO-PH							●	●	●									10	4.0	3.97
10T3MO-KH					●	●												10	4.0	3.97
10T3MO-WH												●						10	4.0	3.97
RCKT1204MO-PH							●	●	●									12	4.0	4.76
1204MO-KH					●	●												12	4.0	4.76
1204MO-WH												●						12	4.0	4.76
RCKT1606MO-PH							●	●	●									16	5.5	6.35
1606MO-KH					●	●												16	5.5	6.35
1606MO-WH												●						16	5.5	6.35


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TP 快进给壳形铣刀　　TP High Feedrate Face Mill

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300





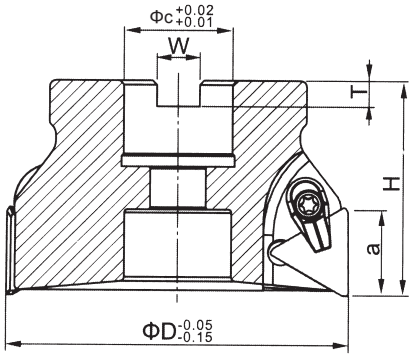

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
TP11 40-16-4T	40	16	42	8.5	5		TPMN11	M5×12	T20
TP11-50-22-4T	50	22	50	10.4	6.3				
TP16-50-22-4T	50	22	50	10.4	6.3		TPMN1603	M5*12	4方
TP16-63-22-4T	63	22	50	10.4	6.3			M6*16	
TP22-50-22-3T	50	22	50	10.4	6.3				
TP22-63-22-3T	63	22	50	10.4	6.3				
TP22-63-22-4T	63	22	50	10.4	6.3				
TP22-80-27-5T	80	27	50	12.4	7		TPKN220408	M5*12	T20
TP22-100-32-5T	100	32	50	8	8		TPKN220412	M8*21	5方
TP22-125-40-6T	125	40	60	16.4	9				
TP22-160-40-7T	160	40	60	16.4	9				
TP22-200-60-9T	200	60	60	26.3	14				
TP22-250-60-12T	250	60	60	26.3	14				

可配用刀片　Inserts


型 号 Cat.No					BT015					刀片形状 Insert sharp	尺寸 Size(mm) d	S1	
TPMN1603					●			●			9.525	3.18	BWIN
TPKN1603PDR					●★			●★			9.525	3.18	
TPMN2204					●			●			12.7	4.76	
TPKN2204PDR					●		●	●			12.7	4.76	
TPKR220408					●★	●★							
TPMN160308		●	●	●							9.525	3.18	
TPMN220412		●	●	●							12.7	4.76	
TPMN220408Y	●										12.7	4.76	
XPKN220412					●			●	●★		12.7	4.76	
							●★						
XPKR220412					●★	●★		●★			12.7	4.76	


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

KM 45 ° 铣刀盘　KM 45° SE1204 / SE13T3 Inserts

库存刃径（Inventory blade diameter）：Φ40、Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300




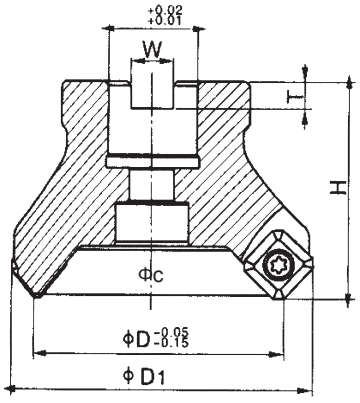




配有钢件、铸件、铝件、多种材质刀片
Equipped with steel, casting, aluminum, various material of blade

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
KM-50-22-4T	50	22	50	10.4	6.3	9	SEEX09T3	M3*7	T8
KM-63-22-4T	63	22	50	10.4	6.3	9			
KM-50-22-4T	50	22	50	10.4	6.3	12	SEMT13T3 SEKT1204 SEHT1204	M4*10 M5*12	T15 T20
KM-63-22-4T	63	22	50	10.4	6.3	12			
KM-80-27-5T	80	27	50	12.4	7	12			
KM-100-32-5T	100	32	50	14.4	8	12			
KM-125-40-6T	125	40	60	16.4	9	12			
KM-160-40-7T	160	40	60	16.4	9	12			
KM-200-60-10T	200	60	60	26.3	14	12			
KM-250-60-12T	250	60	60	26.3	14	12			
KM-300-60-14T	300	60	60	26.3	14	12			
KM-315-60-14T	315	60	60	26.3	14	12			
KM-350-60	350	60	60	26.3	14	12			
KM-400-60	400	60	60	26.3	14	12			

型 号 Cat.No	BT015														刀片形状 Insert shape	尺寸 Size(mm)		
																D1	S1	排屑槽
SEHT1204AFN		●	●	●		●				●						12.7	4.76	有
1204AFN-K88										●						12.7	4.76	有
SEHW1204AFN	●	●	●		●	●	●	●	●							12.7	4.76	无
SECA1204AFSN											●	●				12.7	4.76	无
1204AFTN													●			12.7	4.76	无
1204AFFN														●		12.7	4.76	无
1204AFEN											●					12.7	4.76	无
SEHT1204AFFN-M															●	12.7	4.76	无


型 号 Cat.No												刀片形状 Insert shape	尺寸 Size(mm)		
													D1	S1	排屑槽
SEET1204AFSN-M01						●							12.7	4.76	有
1204AFFN-F01									●				12.7	4.76	有
SEHT1204AF4B							●	●					12.7	4.76	有
1204AFFN										●			12.7	4.76	有
SEHW1204AFN											●		12.7	4.76	无


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

面铣刀盘横向75°二次利用刀片
Face Milling Cutter Transverse 75° Secondary Use Of Inserts

库存刃径（Inventory blade diameter）：Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300



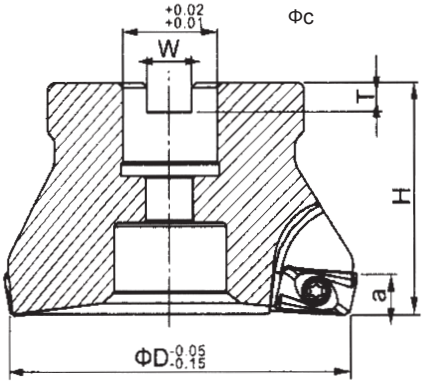



型号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a			
RAP 300R50-22-4T	50	22	50	10.4	6.3	11	APMT1135PD	M2.5*6	T8
RAP 300R63-22-4T	63	22	50	10.4	6.3	11			
RAP 300R80-27-5T	80	27	50	12.4	7	11			
RAP 300R100-32-5T	100	32	50	14.4	8	11			
RAP 300R125-32-6T	125	40	60	16.4	9	11			
RAP 400R50-22-4T	50	22	50	10.4	6.3	16	APMT1604PD	M4*9	T15
RAP 400R63-22-4T	63	22	50	10.4	6.3	16			
RAP 400R80-27-5T	80	27	50	12.4	7	16			
RAP 400R100-32-6T	100	32	50	14.4	8	16			
RAP 400R125-40-6T	125	40	60	16.4	9	16			
RAP 400R160-40-7T	160	40	60	16.4	9	16			
RAP 400R200-60-9T	200	60	60	26.3	14	16			
RAP 400R250-60-10T	250	60	60	26.3	14	16			
RAP 400R315-60-14T	315	60	60	26.3	14	16			
RAP 400R350-60	350	60	60	26.3	14	16			
RAP 400R400-60	400	60	60	26.3	14	16			

可配用刀片 Inserts


型号 Cat.No	BT015		BM035			BT065		BN01												刀片形状 Insert sharp	尺寸 Size(mm)					
																					L1	L2	S1	F1	Re	
APMT1604PDER-H2	●		●			●															16.5	9.525	4.76	1.7	0.4	BWIN
																					16.5	9.525	4.76	1.7	0.8	
																					16.5	9.525	4.76	1.7	1.6	
																					16.5	9.525	4.76	1.7	2.4	
																					16.5	9.525	4.76	1.7	3.2	
APMT1604PDER-M2	●		●★			●															16.5	9.525	4.76	1.7	0.8	
APMT1604PDER-G2								●													16.5	9.525	4.76	1.7	0.8	
APMT1604PDSR									●	●	●	●	●								16.4	9.525	4.76	-	0.8	
APMT1604PDERMA2														●	●						16.4	9.525	4.76	-	0.8	

ASR/ASF 快进给壳形铣刀 ASR/ASF High Feedrate Face Mill

库存刃径（Inventory blade diameter）：Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300








刀片4次转位。
配有钢件、铸件、多种刀片。
Four blades inversion.
Equipped with steel, casting, a variety of blade.

型 号 Cat.No	尺寸 Size(mm) D		c	H	W	T	适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
ASR 50-22-4T	50		22	50	10.4	6.3				
ASR 50-25.4-4T	50		25.4	50	10.4	6.3	EPNM0603TN-8			
ASF 63-22-3T	63		22	50	10.4	6.3	EPMT0603TN-8			
ASF 63-22-4T	63		22	50	10.4	6.3				
ASF 80-27-4T	80		27	50	12.4	7				
ASF 80-27-5T	80		27	50	12.4	7				
ASF 100-32-5T	100		32	50	14.4	8				
ASF 125-40-6T	125		40	60	16.4	9	SD1505ZD	AMS-5	M5*12	T20
ASF 160-40-8T	160		40	60	16.4	9				
ASF 200-60-8T	200		60	60	26.3	14				
ASF 200-60-10T	200		60	60	26.3	14				
ASF 63-25.4-3T	63		25.4	50	10.4	6.3				
ASF 63-25.4-4T	63		25.4	50	10.4	6.3				
ASF 80-25.4-5T	80		25.4	50	12.4	7				
ASF 80-25.4-6T	80		25.4	50	12.4	7				
ASF 100-31.75-5T	100		31.75	50	14.4	8				


可配用刀片 Inserts

型 号 Cat.No	BT015										刀片形状 Insert shape	尺寸 Size(mm) R	T	W	排屑槽
SDNW1505ZDTN-R15	●★	●		●	●	●	●	●				15	5.56	18.875	无
SDMT1505ZDTN-R15	●★			●	●					●		15	5.56	18.875	有
SDMT1505ZDTN-C15	●			●	●		●	●		●		15	5.56	18.875	有
SDEW1505ZDTN-R15	●			●	●		●	●				15	5.56	18.875	无


注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

AJX 快进给快进给刀盘1204刀片/1405刀片
AJX Fast-forward To Fast Forward Milling cutter 1204 / 1405 Inserts

库存刃径（Inventory blade diameter）：Φ50、Φ63、Φ80、Φ100、Φ125、Φ160、Φ200、Φ250、Φ300

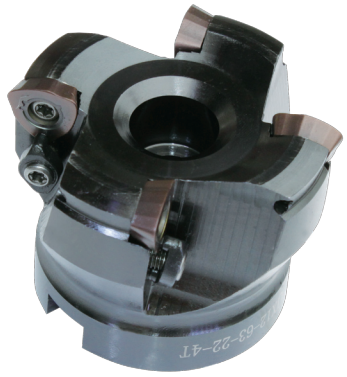




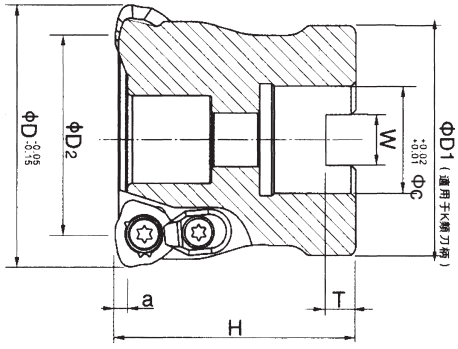

型 号 Cat.No	尺寸 Size(mm)						适用刀片 Applicable inserts	压板 Clamp piece	螺钉 Clamp screw	扳手 Wrench
	D	c	H	W	T	a				
AJX12-50-22-3T	50	22	50	10.4	6.3	1.5	JDMW120420	AMS-4	MA*10	T15
AJX12-50-22-4T	50	22	50	10.4	6.3	1.5	JDMW120420			
AJX12-63-22-4T	63	22	50	10.4	6.3	1.5	JDMW120420			
AJX12-80-27-5T	80	27	50	12.4	7	1.5	JDMW140520	AMS-5	M*12	T20
AJX12-100-32-5T	100	32	50	14.4	8	1.5	JDMW140520			
AJX12-125-40-6T	125	40	60	16.4	9	1.5	JDMW140520			
AJX12-63-25.4-4T	63	25.4	50	12.4	7	1.5	JDMW140520			
AJX12-80-25.4-5T	80	25.4	50	12.4	7	1.5				
AJX12-100-31.75-5T	100	31.75	50	14.4	8	1.5		AMS-5		
AJX14-63-22-4T	63	22	50	10.4	6.3	2				
AJX14-80-27-4T	80	27	50	12.4	7	2				
AJX14-80-27-5T	80	27	50	12.4	7	2		AMS-5		
AJX14-100-32-5T	100	32	50	14.4	8	2				
AJX14-125-40-6T	125	40	60	16.4	9	2				


可配用刀片 Inserts

型 号 Cat.No	BM035			刀片形状 Insrt shape	尺寸 Size(mm)					
					B3°	D1	S1	F1	Re	排屑槽
JDMW120420ZDSR-FT	●	●★	●		15	12	4.76	5	2	无
140520ZDSR-FT	●	●★	●		15	14	5.56	5	2	无
JDMT120420ZDSR-ST	●	●	●		15	12	4.76	5	2	有
120420ZDSR-JM	●	●	●		15	12	4.76	5	2	有
140520ZDSR-ST	●	●	●		15	14	5.56	5	2	有
140520ZDSR-JM	●	●	●		15	14	5.56	5	2	有

注：库存型号繁多，页面有限，请咨询我公司。
Note: the inventory model is various, the page is limited, please consult our company.

TAP 粗切削玉米铣刀 TAP Roughing Cut Corn Milling Cutter



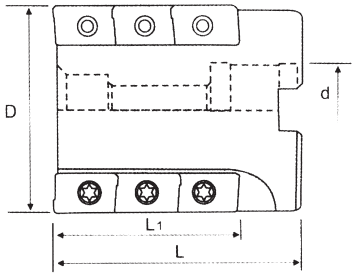

型 号 Cat.No	D	C	L	刀片数	刀片	螺丝	扳手
TAP16–D50–22–42M–3T–12P	50	22	42	12	APMT1604PD	M4*10	T15
TAP16–D63–27–42M–4T–12P	63	27	42	12			
TAP16–D50–22–60M–4T–16P	50	22	60	16			
TAP16–D63–27–60M–4T–16P	63	27	60	16			
TAP16–D80–32–72M–5T–25P	80	32	72	25			
TAP16–D100–40–72M–6T–30P	100	40	72	30			